




# LSD Series Low Profile Type Linear Guide

## Product Introduction

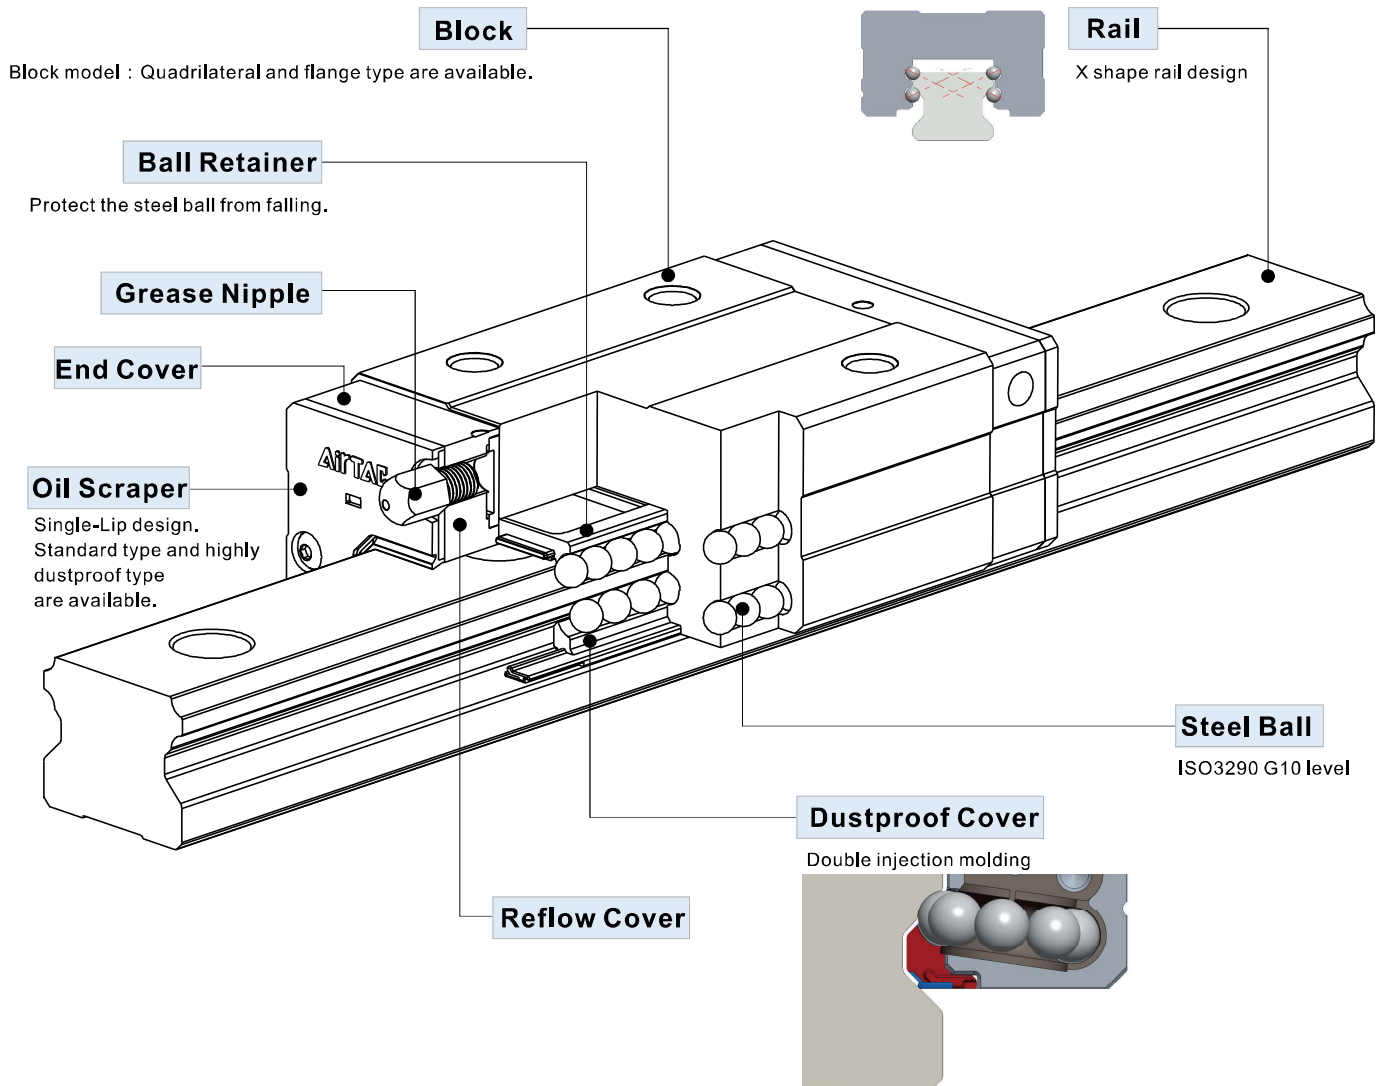

## Product Features

### 1. With self-adjustment ability

X-shaped ( $45^{\circ}$ - $45^{\circ}$ ) of curved groove on cross section design makes it self-aligning. Even small misalignment exists on the mounting surface, this design can help absorb it and maintain high precision, smooth and stable linear motion.

### 2. Low profile, High rigidity, equal load on four direction design

The 45-degree contact angle design of the four rows of steel balls and the raceway allow the steel balls to achieve the ideal two-point contact, and can withstand the action and reaction force from the radial and lateral direction. Meanwhile, pre-load can be applied to increase extra rigidity if necessary. Reduce the combined height of the slide block and the slide rail, shorten the length of the slide block, to achieve miniaturization.

### 3. Interchangeable

Because of the strict control on manufacturing process, the dimensional accuracy is stable and within the set tolerance.

Besides, the ball retainer design can prevent steel balls from falling out. Therefore when assembling, blocks are interchangeable within the same spec and still maintain consistency of pre-load and accuracy.



# Low Profile Type Linear Guide

## LSD Series



### Order Information(Combined)

#### 1、LSD15/30

LSD □ 15 H N 1 X 220 S20 A H - U - AM6 - B - T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

|                                   |                                                                                                                                               |  |                                                                                 |  |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------|--|
| ① Model Code                      | LSD:Low Profile Type Linear Guide                                                                                                             |  |                                                                                 |  |
| ② Rail&Block surface treatment    | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                           |  |                                                                                 |  |
| ③ Rail Width                      | 15:15mm    30:28mm                                                                                                                            |  |                                                                                 |  |
| ④ Block Style                     | H: Square type    F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |  |                                                                                 |  |
| ⑤ Block type                      | S: Short    N: Standard                                                                                                                       |  |                                                                                 |  |
| ⑥ Number of Block                 | 1: One   2: Two [Note: Amount of block on a single set of linear guide]                                                                       |  |                                                                                 |  |
| ⑦ Length of Rail                  | 220:220mm .....[Defined by customer]                                                                                                          |  |                                                                                 |  |
| ⑧ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)                  |  |                                                                                 |  |
| ⑨ Preload                         | A: Standard clearance   B: Light Preload   C: Medium Preload                                                                                  |  |                                                                                 |  |
| ⑩ Accuracy                        | N : Normal    H : High    P : Precision                                                                                                       |  |                                                                                 |  |
| ⑪ Rail type                       | LSD15:Blank: Top-mount(M4)                                                                                                                    |  | LSD15:U: Top-mount(M3)                                                          |  |
|                                   | LSD30:Blank: Top-mount(M6)                                                                                                                    |  | LSD30:U: Top-mount(M8)                                                          |  |
| ⑫ Nipple /adapter type            | LSD15:<br>M4: M4 Nipple                                                                                                                       |  | LSD15:<br>AM6: M4 to M6                                                         |  |
|                                   | LSD30:<br>M6: M6 Nipple                                                                                                                       |  | LSD30:<br>A01: M6 to PT1/8<br>L01: M6 to PT1/8<br>SM6: M6 Nipple                |  |
| ⑬ Packing type                    | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                               |  | Blank: the block and rail are assembled<br>B: block and rail are put separately |  |
|                                   | Blank: Top-mount    T: Bottom-mount                                                                                                           |  | Blank: Top-mount    T: Bottom-mount                                             |  |

- ★[Note 1] Dustproof standard type please refer to Pg. 52. for more detail.  
★[Note 2] Self-lubricator standard type please refer to Pg. 58. for more detail.  
[Note 3] For LSD-BB series, standard length of a rail is 3 m.  
Please contact with our company if length of rail exceeds the maximum.  
Add: Rail type indicated in ⑩ and ⑪ in ordering code cannot be selected at the same time, only one of them can be selected.

# Low Profile Type Linear Guide

## LSD Series

### 2、LSD20/25/35

LSD □ 20 H N 1 X220 S20 A H - AM8 - B - T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

|                                   |                                                                                                                                               |                                                                                                |                                                                                                |                                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| ① Model Code                      | LSD:Low Profile Type Linear Guide                                                                                                             |                                                                                                |                                                                                                |                                                                                             |
| ② Rail&Block surface treatment    | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                           |                                                                                                |                                                                                                |                                                                                             |
| ③ Rail Width                      | 20:20mm    25:23mm    35:34mm                                                                                                                 |                                                                                                |                                                                                                |                                                                                             |
| ④ Block Style                     | H: Square type    F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |                                                                                                |                                                                                                |                                                                                             |
| ⑤ Block type                      | S: Short    N: Standard                                                                                                                       |                                                                                                |                                                                                                |                                                                                             |
| ⑥ Number of Block                 | 1: One    2: Two [Note: Amount of block on a single set of linear guide]                                                                      |                                                                                                |                                                                                                |                                                                                             |
| ⑦ Length of Rail                  | 220:220mm .....[Defined by customer]                                                                                                          |                                                                                                |                                                                                                |                                                                                             |
| ⑧ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)                  |                                                                                                |                                                                                                |                                                                                             |
| ⑨ Preload                         | A: Standard clearance    B: Light Preload    C: Medium Preload                                                                                |                                                                                                |                                                                                                |                                                                                             |
| ⑩ Accuracy                        | N : Normal    H : High    P : Precision                                                                                                       |                                                                                                |                                                                                                |                                                                                             |
| ⑪ Nipple /adapter type            | M6:M6 Nipple                                                                                                                                  | A01:M6 to PT1/8<br>AM8:M6 to M8                                                                | L01:M6 to PT1/8<br>LM8:M6 to M8                                                                | SM6: M6 Nipple                                                                              |
|                                   |                                                             | I type<br> | L type<br> | SM6<br> |
| ⑫ Packing type                    | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                               |                                                                                                |                                                                                                |                                                                                             |
| ⑬ Rail type                       | Blank: Top-mount    T: Bottom-mount                                                                                                           |                                                                                                |                                                                                                |                                                                                             |

★[Note 1] Dustproof standard type please refer to Pg. 52. for more detail.

★[Note 2] Self-lubricator standard type please refer to Pg. 58. for more detail.

[Note 3] For LSD-BB series, standard length of a rail is 3 m.

Please contact with our company if length of rail exceeds the maximum.

# Low Profile Type Linear Guide

## LSD Series

### Butt-jointed Order Information

#### 1、LSD15/30

LSD □ 15 H N 1X2970 T 2940T2970 A H-U- AM6-B -T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰

Butt-jointed end margin: 1/2P ,  
Position of the first and last  
hole is defined by customer.

|                                |                                                                                                                                            |       |                         |       |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------|-------|
| ① Model Code                   | LSD:Low Profile Type Linear Guide                                                                                                          |       |                         |       |
| ② Rail&Block surface treatment | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                        |       |                         |       |
| ③ Rail Width                   | 15:15mm 30:28mm                                                                                                                            |       |                         |       |
| ④ Block Style                  | H: Square type F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |       |                         |       |
| ⑤ Block type                   | S: Short N: Standard                                                                                                                       |       |                         |       |
| ⑥ Number of Block              | 1: One<br>2: Two [Note: Amount of block on a single set of linear guide]                                                                   |       |                         |       |
| ⑦ Length of first Rail         | 2970:2970mm .....[Defined by customer]                                                                                                     |       |                         |       |
| ⑧ Butt-jointed mark            | T: Rail Butt-jointed mark(Butt-jointed end margin: 1/2P)<br>[P is the standard hole distance]                                              |       |                         |       |
| ⑨ Length of second Rail        | 2940:2940mm .....[Defined by customer]                                                                                                     |       |                         |       |
| ⑩ Butt-jointed mark            | Blank: two rails joint T: Rail Butt-jointed mark<br>(Butt-jointed end margin: 1/2P) [P is the standard hole distance]                      |       |                         |       |
| ⑪ Length of third Rail         | Blank: two rails joint<br>2970:2970mm..[Defined by the customer]                                                                           |       |                         |       |
| ⑫ Preload                      | A: Standard clearance B: Light Preload C: Medium Preload                                                                                   |       |                         |       |
| ⑬ Accuracy                     | N : Normal H : High                                                                                                                        |       |                         |       |
| ⑭ Rail type                    | LSD15:Blank: Top-mount(M4)                                                                                                                 |       | LSD15:U: Top-mount(M3)  |       |
|                                | LSD30:Blank: Top-mount(M6)                                                                                                                 |       | LSD30:U: Top-mount(M8)  |       |
|                                | LSD15                                                                                                                                      | LSD30 | LSD15                   | LSD30 |
|                                |                                                                                                                                            |       |                         |       |
| ⑮ Nipple /adapter type         | LSD15: M4: M4 Nipple                                                                                                                       |       | LSD15: LM6: M4 to M6    |       |
|                                | LSD30: M6: M6 Nipple                                                                                                                       |       | LSD30: L01: M6 to PT1/8 |       |
|                                | LSD30: AM8: M6 to M8                                                                                                                       |       | LSD30: LM8: M6 to M8    |       |
|                                |                                                                                                                                            |       |                         |       |
| ⑯ Packing type                 | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                            |       |                         |       |
| ⑰ Rail type                    | Blank: Top-mount T: Bottom-mount                                                                                                           |       |                         |       |

- ★[Note 1] Dustproof standard type please refer to Pg. 52. for more detail.  
★[Note 2] Self-lubricator standard type please refer to Pg. 58. for more detail.

[Note 3] For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m.

Maximum length of three-joint rail is 9 m.

Please contact with our company  
if length of rail exceeds the maximum.

Add1 : Number of joints cannot be more than 2 times(three rails at most).

For LSD15, maximum length of jointed rail is 12080mm.

For LSD30, it's 12030.

Customization is needed for joint times more than standard.

Add2 :Rail type indicated in ⑭ and ⑰ in ordering code cannot be selected  
at the same time, only one of them can be selected.

# Low Profile Type Linear Guide

## LSD Series

### 2、LSD20/25/35

LSD □ 20 H N 1X2970T2940T2970A H-AM8-B-T

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Butt-jointed end margin:1/2P ,  
Position of the first and last  
hole is defined by customer.

|                                |                                                                                                                                                 |                                                                                              |                                                                                              |                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| ① Model Code                   | LSD:Low Profile Type Linear Guide                                                                                                               |                                                                                              |                                                                                              |                                                                                           |
| ② Rail&Block surface treatment | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                             |                                                                                              |                                                                                              |                                                                                           |
| ③ Rail Width                   | 20:20mm                                                                                                                                         | 25:23mm                                                                                      | 35:34mm                                                                                      |                                                                                           |
| ④ Block Style                  | H: Square type      F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |                                                                                              |                                                                                              |                                                                                           |
| ⑤ Block type                   | S: Short    N: Standard                                                                                                                         |                                                                                              |                                                                                              |                                                                                           |
| ⑥ Number of Block              | 1: One    2: Two [Note: Amount of block on a single set of linear guide]                                                                        |                                                                                              |                                                                                              |                                                                                           |
| ⑦ Length of first Rail         | 2970:2970mm .....[Defined by customer]                                                                                                          |                                                                                              |                                                                                              |                                                                                           |
| ⑧ Butt-jointed mark            | T: Rail Butt-jointed mark<br>(Butt-jointed end margin:1/2P) [P is the standard hole distance]                                                   |                                                                                              |                                                                                              |                                                                                           |
| ⑨ Length of second Rail        | 2940:2940mm .....[Defined by customer]                                                                                                          |                                                                                              |                                                                                              |                                                                                           |
| ⑩ Butt-jointed mark            | Blank: two rails joint      T: Rail Butt-jointed mark<br>(Butt-jointed end margin:1/2P) [P is the standard hole distance]                       |                                                                                              |                                                                                              |                                                                                           |
| ⑪ Length of third Rail         | Blank: two rails joint    2970:2970mm..[Defined by the customer]                                                                                |                                                                                              |                                                                                              |                                                                                           |
| ⑫ Preload                      | A: Standard clearance    B: Light Preload    C: Medium Preload                                                                                  |                                                                                              |                                                                                              |                                                                                           |
| ⑬ Accuracy                     | N : Normal      H : High                                                                                                                        |                                                                                              |                                                                                              |                                                                                           |
| ⑭ Nipple /adapter type         | M6: M6 Nipple                                                                                                                                   | A01: M6 to PT1/8<br>AM8: M6 to M8                                                            | L01: M6 to PT1/8<br>LM8: M6 to M8                                                            | SM6: M6 Nipple                                                                            |
|                                |                                                             | I type  | L type  | SM6  |
| ⑮ Packing type                 | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                                 |                                                                                              |                                                                                              |                                                                                           |
| ⑯ Rail type                    | Blank: Top-mount      T: Bottom-mount                                                                                                           |                                                                                              |                                                                                              |                                                                                           |

- ★[Note 1] Dustproof standard type please refer to Pg. 52. for more detail.  
★[Note 2] Self-lubricator standard type please refer to Pg. 58. for more detail.

[Note 3] For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m.

Maximum length of three-joint rail is 9 m.

Please contact with our company  
if length of rail exceeds the maximum.

Add: Number of joints cannot be more than 2 times(three rails at most).

For LSD20/25, maximum length of jointed rail is 12080mm.

For LSD35, it's 12030.

Customization is needed for joint times more than standard.


# Low Profile Type Linear Guide

## LSD Series


### 1. Block Order Information

LSD □ 15 BK - H N - H - E - AM6

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



S: Short



N: Standard

★ [Note 1] Dustproof standard type please refer to Pg. 52. for more detail.

★ [Note 2] Self-lubricator standard type please refer to Pg. 58. for more detail.

[Note3] When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

|                        |                                                                                                                                            |         |           |         |         |                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|---------|---------|--------------------|
| ① Model Code           | LSD:Low Profile Type Linear Guide                                                                                                          |         |           |         |         |                    |
| ② Coating on block     | Blank: Block without additional coating, (natural color)<br>★B: Block coated with black chrome                                             |         |           |         |         |                    |
| ③ Rail Width           | 15:15mm                                                                                                                                    | 20:20mm | 25:23mm   | 30:28mm | 35:34mm |                    |
| ④ Block Code           | BK: Block                                                                                                                                  |         |           |         |         |                    |
| ⑤ Block Style          | H: Square type F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |         |           |         |         |                    |
| ⑥ Block type           | S: Short N: Standard                                                                                                                       |         |           |         |         |                    |
| ⑦ Accuracy             | N: Normal H: High                                                                                                                          |         |           |         |         |                    |
| ⑧ Group code           | SA SB SC C E [Note3]                                                                                                                       |         |           |         |         |                    |
| ⑨ Nipple /adapter type | 15                                                                                                                                         | M4      | M4 Nipple |         | M6      | M6 Nipple          |
|                        |                                                                                                                                            | AM6     | M4 to M6  | I type  | A01     | M6 to PT1/8 I type |
|                        |                                                                                                                                            |         |           |         | AM8     | M6 to M8           |
|                        |                                                                                                                                            |         |           | L type  | L01     | M6 to PT1/8 L type |
|                        |                                                                                                                                            | LM6     | M4 to M6  |         | LM8     | M6 to M8           |
|                        |                                                                                                                                            |         |           |         | SM6     | M6 Nipple          |


### 2. Rail Order Information

#### (1) LSD15/30

LSD 15 RL X 4000 - H - E - U

① ② ③ ④ ⑤ ⑥ ⑦

|               |                                   |       |                            |       |
|---------------|-----------------------------------|-------|----------------------------|-------|
| ① Model Code  | LSD:Low Profile Type Linear Guide |       |                            |       |
| ② Rail Width  | 15:15mm 30:28mm                   |       |                            |       |
| ③ Rail Code   | RL: Rail                          |       |                            |       |
| ④ Rail Length | 15 : 4040mm 30 : 4030mm           |       |                            |       |
| ⑤ Accuracy    | N: Normal H: High                 |       |                            |       |
| ⑥ Group code  | E [Note]                          |       |                            |       |
| ⑦ Rail type   | LSD15:<br>Blank: Top-mount(M4)    |       | LSD15:<br>U: Top-mount(M3) |       |
|               | LSD30:<br>Blank: Top-mount(M6)    |       | LSD30:<br>U: Top-mount(M8) |       |
|               | LSD15                             | LSD30 | LSD15                      | LSD30 |
|               |                                   |       |                            |       |



Note: •For LSD15, both margin pitch of rail are 40mm.

•For LSD30, both margin pitch of rail are 55mm.


•When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

#### (2) LSD20/25/35

LSD 20 RL X 4000- H - E - T

① ② ③ ④ ⑤ ⑥ ⑦

|               |                                     |  |  |  |
|---------------|-------------------------------------|--|--|--|
| ① Model Code  | LSD:Low Profile Type Linear Guide   |  |  |  |
| ② Rail Width  | 20:20mm 25:23mm 35:34mm             |  |  |  |
| ③ Rail Code   | RL: Rail                            |  |  |  |
| ④ Rail Length | 20 : 4040mm 25 : 4040mm 35 : 4030mm |  |  |  |
| ⑤ Accuracy    | N: Normal H: High                   |  |  |  |
| ⑥ Group Code  | E [Note]                            |  |  |  |
| ⑦ Rail type   | Blank: Top-mount T: Bottom-mount    |  |  |  |



Note: •For LSD20/25, both margin pitch of rail are 40mm.

•For LSD35, both margin pitch of rail are 55mm.

•When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

# Low Profile Type Linear Guide

## LSD Series

### 3. Rail Order Information


#### (1) LSD15/30

LSD □ 15 RL X 220-S20 -H - E - U

1 2 3 4 5 6 7 8 9

Note:1.When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".  
2.For LSD-B series, standard length of a rail is 3 m.

|                                   |                                                                                                                                                                 |                            |                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------|
| ① Model Code                      | LSD:Low Profile Type Linear Guide                                                                                                                               |                            |                 |
| ② Coating on rail                 | Blank: Rail without additional coating. (natural color)<br>★B: Rail coated with black chrome                                                                    |                            |                 |
| ③ Rail Width                      | 15:15mm 30:28mm                                                                                                                                                 |                            |                 |
| ④ Rail Code                       | RL: Rail                                                                                                                                                        |                            |                 |
| ⑤ Rail Length                     | 220:220mm .....[Defined by customer]                                                                                                                            |                            |                 |
| ⑥ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)<br>[Standard margin pitch is 20mm] |                            |                 |
| ⑦ Accuracy                        | N : Normal H : High                                                                                                                                             |                            |                 |
| ⑧ Group code                      | E [Note]                                                                                                                                                        |                            |                 |
| ⑨ Rail type                       | LSD15:<br>Blank: Top-mount(M4)                                                                                                                                  | LSD15:<br>U: Top-mount(M3) | T: Bottom-mount |
|                                   | LSD30:<br>Blank: Top-mount(M6)                                                                                                                                  | LSD30:<br>U: Top-mount(M8) |                 |
|                                   | LSD15<br>Φ8<br>Φ4.8                                                                                                                                             | LSD30<br>Φ11.2<br>Φ7       |                 |
|                                   | LSD15<br>Φ6<br>Φ3.5                                                                                                                                             | LSD30<br>Φ14.2<br>Φ9       |                 |




#### (2) LSD20/25/35

LSD □ 20 RL X 220-S20 -H - E - T

1 2 3 4 5 6 7 8 9

Note:1.When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".  
2.For LSD-B series, standard length of a rail is 3 m.

|                                   |                                                                                                                                                                 |  |  |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| ① Model Code                      | LSD:Low Profile Type Linear Guide                                                                                                                               |  |  |
| ② Coating on rail                 | Blank: Rail without additional coating. (natural color)<br>★B: Rail coated with black chrome                                                                    |  |  |
| ③ Rail Width                      | 20:20mm 25:23mm 35:34mm                                                                                                                                         |  |  |
| ④ Rail Code                       | RL: Rail                                                                                                                                                        |  |  |
| ⑤ Rail Length                     | 220:220mm .....[Defined by customer]                                                                                                                            |  |  |
| ⑥ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)<br>[Standard margin pitch is 20mm] |  |  |
| ⑦ Accuracy                        | N : Normal H : High                                                                                                                                             |  |  |
| ⑧ Group code                      | E [Note]                                                                                                                                                        |  |  |
| ⑨ Rail type                       | Blank: Top-mount T: Bottom-mount                                                                                                                                |  |  |



### 4. Rail/Block preload pairing chart

When customer orders rail/block, please choose the pairing code of rail/block in accordance with the needed preload of linear guide(combined). Details please refer to the "preload pairing chart".

| Model | Rail pairing code | Block pairing code | Preload grade      | Model | Rail pairing code | Block pairing code | Preload grade      | Model | Rail pairing code | Block pairing code | Preload grade      |
|-------|-------------------|--------------------|--------------------|-------|-------------------|--------------------|--------------------|-------|-------------------|--------------------|--------------------|
| LSD15 | E                 | E                  | Standard clearance | LSD30 | E                 | E                  | Standard clearance | LSD35 | E                 | E                  | Standard clearance |
| LSD20 |                   | C                  | Light preload      |       |                   | C                  | Light preload      |       |                   | C                  | Light preload      |
| LSD25 |                   | SA                 | Medium preload     |       |                   | SB                 | Medium preload     |       |                   | SC                 | Medium preload     |

### Accessory Order Code

L - P - AM6 - □

1 2 3 4

| ①Accessory Code                                                                                                                                                      |    | L: Linear Guide Accessory |           |                                                                                     |                      |                                                                                     |                                                                                     |                                                                                       |        |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|---------------------------|-----------|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------------|
| ②Nipple/adaptor Code                                                                                                                                                 |    | P: Nipple/adaptor         |           |                                                                                     |                      |                                                                                     |                                                                                     |                                                                                       |        |                                                                                       |
| ③Nipple/adaptor type                                                                                                                                                 | 15 | M4                        | M4 Nipple |  | 20<br>25<br>30<br>35 | M6                                                                                  | M6 Nipple                                                                           |  |        |                                                                                       |
|                                                                                                                                                                      |    | AM6                       | M4 to M6  |                                                                                     |                      | I type                                                                              |  |                                                                                       | A01    | M6 to PT1/8                                                                           |
|                                                                                                                                                                      |    |                           |           | AM8                                                                                 |                      |                                                                                     |                                                                                     | M6 to M8                                                                              |        |                                                                                       |
|                                                                                                                                                                      |    |                           |           | L01                                                                                 |                      |                                                                                     |                                                                                     | M6 to PT1/8                                                                           | L type |  |
|                                                                                                                                                                      |    | LM6                       | M4 to M6  | L type                                                                              |                      |  | SM6                                                                                 | M6 Nipple                                                                             |        |                                                                                       |
| ④Block type                                                                                                                                                          |    |                           |           |                                                                                     |                      |                                                                                     |                                                                                     |                                                                                       |        |                                                                                       |
| Blank: Standard ZZ: For LSD15/25/30/35 series highly dustproof block (both DD and ZZ type)<br>ZZLSD20: For LSD20 series highly dustproof block (both DD and ZZ type) |    |                           |           |                                                                                     |                      |                                                                                     |                                                                                     |                                                                                       |        |                                                                                       |

# Low Profile Type Linear Guide


## LSD Series

### Rail Specification

1.The maximum length of a single rail , please refer to the table for more detail about edge pitch of first mounting hole (S) and last mounting hole (E).

2.The edge pitch of first mounting hole (S) and last mounting hole (E) should not be greater than 1/2P. Overlong edge may induce unstable installation and affect the accuracy.

n: Numbers of mounting holes

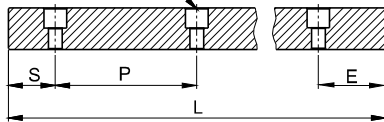

$$L=(n-1) \times P+S+E$$

L: Total length of rail(mm)

n: Numbers of mounting holes on rail

P:Distance between bolt holes(mm)

S:Edge of first mounting hole(mm)

E:Edge of last mounting hole(mm)


| Model                    | LSD15  | LSD20 | LSD25 | LSD30  | LSD35 |
|--------------------------|--------|-------|-------|--------|-------|
| Pitch(P)                 | 60     | 60    | 60    | 80     | 80    |
| Standard Edge Pitch(S/E) | 40     | 40    | 40    | 55     | 55    |
| Min. Edge Pitch(S/E min) | 5(4)   | 6     | 7     | 7(8)   | 8     |
| Max. Edge Pitch(S/E max) | 55(56) | 54    | 53    | 73(72) | 72    |
| Maximum length(Lmax)     | 4040   | 4040  | 4040  | 4030   | 4030  |

Note:

- For LSD15 when it mounted with M3 screw, Min.edge pitch is 4mm, Max.edge pitch is 56mm.  
For LSD15 when it mounted with M4 screw, Min.edge pitch is 5mm, Max. edge pitch is 55mm.
- For LSD30 when it mounted with M6 screw, Min.edge pitch is 7mm, Max.edge pitch is 73mm.  
For LSD30 when it mounted with M8 screw, Min.edge pitch is 8mm, Max. edge pitch is 72mm.
- Joint rail must be chosen if length of rail exceeds the maximum.
- When deciding edge pitch, it should be within the range of above table.  
There would be risk of broken hole if pitch is out of range.
- Maximum length of rail for standard' means the maximum length of rail can be chosen when both sides of edge pitches are standard.

## Specifications and Dimensions

### Square type

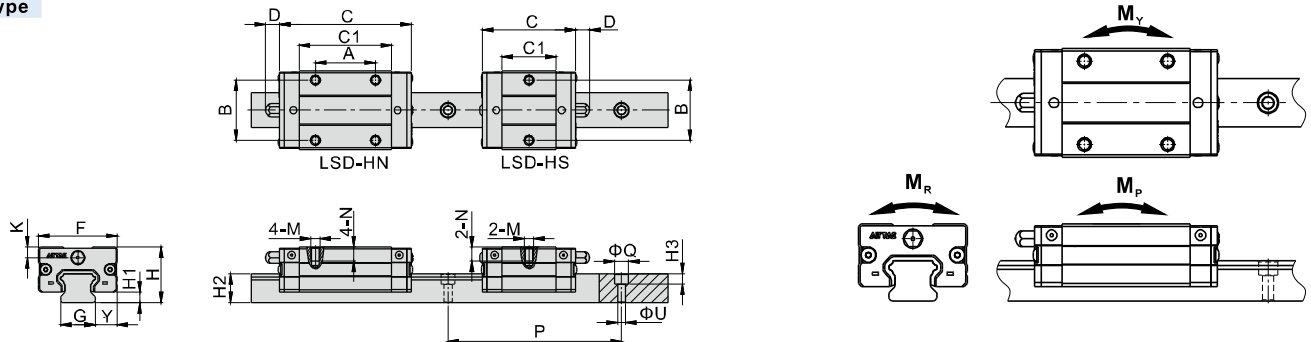

| Model\Item | External Dimension ( mm ) |     |    |      |                  |                         |                               | Block Dimension ( mm ) |    |    |     |    |         |    | Rail Dimension ( mm ) |      |    |            |          |          |  |
|------------|---------------------------|-----|----|------|------------------|-------------------------|-------------------------------|------------------------|----|----|-----|----|---------|----|-----------------------|------|----|------------|----------|----------|--|
|            | H                         | H1  | F  | Y    | C                |                         |                               | C1                     | A  | B  | K   | D  | M       | N  | G                     | H2   | P  | ΦQ[Note]   | ΦU       | H3       |  |
|            |                           |     |    |      | Standard (Blank) | Double oil scrapers(DD) | Oil scraper+Metal scraper(ZZ) |                        |    |    |     |    |         |    |                       |      |    |            |          |          |  |
| LSD15HS    | 24                        | 4.5 | 34 | 9.5  | 40.5             | 47.5                    | 45                            | 23.5                   | -  | 26 | 4.6 | 6  | M4X0.7  | 6  | 15                    | 12.5 | 60 | 8(6)       | 4.8(3.5) | 5.3(4.5) |  |
| LSD15HN    | 24                        | 4.5 | 34 | 9.5  | 57               | 64                      | 61.5                          | 40                     | 26 | 26 | 4.6 | 6  | M4X0.7  | 6  | 15                    | 12.5 | 60 | 8(6)       | 4.8(3.5) | 5.3(4.5) |  |
| LSD20HS    | 28                        | 6   | 42 | 11   | 46               | 53                      | 50.5                          | 29                     | -  | 32 | 6.2 | 13 | M5X0.8  | 7  | 20                    | 15.5 | 60 | 9.5        | 5.8      | 8.5      |  |
| LSD20HN    | 28                        | 6   | 42 | 11   | 65               | 72                      | 69.5                          | 48                     | 32 | 32 | 6.2 | 13 | M5X0.8  | 7  | 20                    | 15.5 | 60 | 9.5        | 5.8      | 8.5      |  |
| LSD25HS    | 33                        | 7   | 48 | 12.5 | 59               | 66                      | 63.5                          | 36.5                   | -  | 35 | 7.2 | 13 | M6X1.0  | 9  | 23                    | 18   | 60 | 11.2       | 7        | 9        |  |
| LSD25HN    | 33                        | 7   | 48 | 12.5 | 83               | 90                      | 87.5                          | 60.5                   | 35 | 35 | 7.2 | 13 | M6X1.0  | 9  | 23                    | 18   | 60 | 11.2       | 7        | 9        |  |
| LSD30HS    | 42                        | 9   | 60 | 16   | 68.5             | 76.5                    | 73.5                          | 41.5                   | -  | 40 | 7.2 | 13 | M8X1.25 | 12 | 28                    | 23   | 80 | 11.2(14.2) | 7(9)     | 9(12)    |  |
| LSD30HN    | 42                        | 9   | 60 | 16   | 97               | 105                     | 102                           | 70                     | 40 | 40 | 7.2 | 13 | M8X1.25 | 12 | 28                    | 23   | 80 | 11.2(14.2) | 7(9)     | 9(12)    |  |
| LSD35HS    | 48                        | 11  | 70 | 18   | 73.5             | 81.5                    | 78.5                          | 46.5                   | -  | 50 | 8.5 | 13 | M8X1.25 | 12 | 34                    | 27.5 | 80 | 14.2       | 9        | 12       |  |
| LSD35HN    | 48                        | 11  | 70 | 18   | 106.5            | 114.5                   | 111.5                         | 79.5                   | 50 | 50 | 8.5 | 13 | M8X1.25 | 12 | 34                    | 27.5 | 80 | 14.2       | 9        | 12       |  |


| Model\Item | Mounting Screw | Dynamic Load Rating(kN) | Static Load Rating(kN) | Static Rated Moment (kN.m) |                |                | Weight    |            |
|------------|----------------|-------------------------|------------------------|----------------------------|----------------|----------------|-----------|------------|
|            |                | C                       | C <sub>0</sub>         | M <sub>R</sub>             | M <sub>P</sub> | M <sub>V</sub> | Block(kg) | Rail(kg/m) |
| LSD15HS    | M4(M3)         | 5.0                     | 9.5                    | 0.07                       | 0.04           | 0.04           | 0.09      | 1.23       |
| LSD15HN    | M4(M3)         | 8.9                     | 16.5                   | 0.12                       | 0.10           | 0.10           | 0.15      | 1.23       |
| LSD20HS    | M5             | 7.2                     | 13.5                   | 0.13                       | 0.06           | 0.06           | 0.14      | 2.11       |
| LSD20HN    | M5             | 12.1                    | 22.4                   | 0.20                       | 0.15           | 0.15           | 0.23      | 2.11       |
| LSD25HS    | M6             | 11.5                    | 20.8                   | 0.22                       | 0.11           | 0.11           | 0.26      | 2.76       |
| LSD25HN    | M6             | 19.3                    | 34.7                   | 0.36                       | 0.31           | 0.31           | 0.42      | 2.76       |
| LSD30HS    | M6(M8)         | 19.8                    | 30.0                   | 0.38                       | 0.20           | 0.20           | 0.44      | 4.60       |
| LSD30HN    | M6(M8)         | 28.3                    | 50.3                   | 0.65                       | 0.53           | 0.53           | 0.75      | 4.60       |
| LSD35HS    | M8             | 29.2                    | 40.7                   | 0.66                       | 0.33           | 0.33           | 0.74      | 6.27       |
| LSD35HN    | M8             | 42.7                    | 70.2                   | 1.02                       | 0.72           | 0.72           | 1.17      | 6.27       |

[Note]: The standard countersink of LSD15 rail is Φ8X5.3XΦ4.8 and with M4 screw. If with M3 screw, the ordering code should add "U", and the countersink is Φ6X4.5XΦ3.5. The standard countersink of LSD30 rail is Φ11.2X9XΦ7 and with M6 screw. If with M8 screw, the ordering code should add "U", and the countersink is Φ14.2X12XΦ9.

# Low Profile Type Linear Guide

## LSD Series

### Flange type, Top-Mount

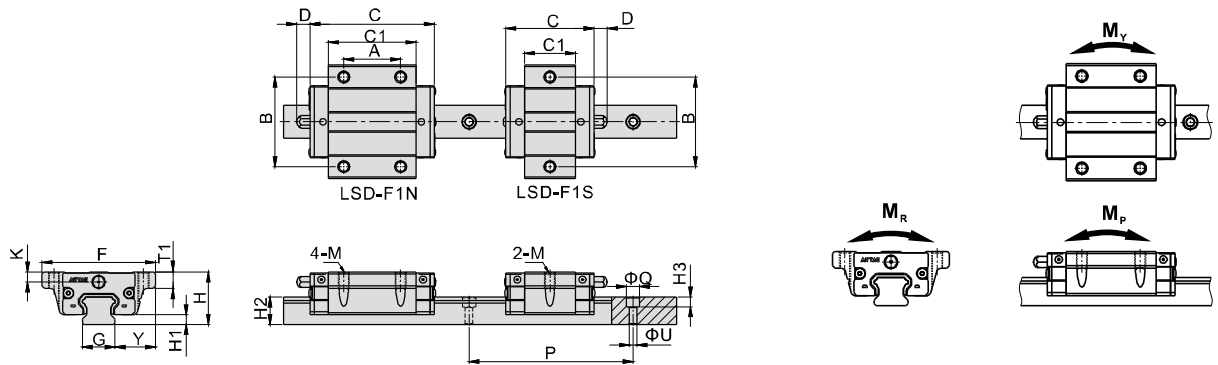

| Model\Item | External Dimension ( mm ) |     |     |      |                  |                         |                               | Block Dimension ( mm ) |    |    |     |    |         |      | Rail Dimension ( mm ) |      |    |            |          |          |  |
|------------|---------------------------|-----|-----|------|------------------|-------------------------|-------------------------------|------------------------|----|----|-----|----|---------|------|-----------------------|------|----|------------|----------|----------|--|
|            | H                         | H1  | F   | Y    | C                |                         |                               | C1                     | A  | B  | K   | D  | M       | T1   | G                     | H2   | P  | ΦQ[Note]   | ΦU       | H3       |  |
|            |                           |     |     |      | Standard (Blank) | Double oil scrapers(DD) | Oil scraper+Metal scraper(ZZ) |                        |    |    |     |    |         |      |                       |      |    |            |          |          |  |
| LSD15F1S   | 24                        | 4.5 | 52  | 18.5 | 40.5             | 47.5                    | 45                            | 23.5                   | -  | 41 | 4.6 | 6  | M5X0.8  | 7.5  | 15                    | 12.5 | 60 | 8(6)       | 4.8(3.5) | 5.3(4.5) |  |
| LSD15F1N   | 24                        | 4.5 | 52  | 18.5 | 57               | 64                      | 61.5                          | 40                     | 26 | 41 | 4.6 | 6  | M5X0.8  | 7.5  | 15                    | 12.5 | 60 | 8(6)       | 4.8(3.5) | 5.3(4.5) |  |
| LSD20F1S   | 28                        | 6   | 59  | 19.5 | 46               | 53                      | 50.5                          | 29                     | -  | 49 | 6.2 | 13 | M6X1.0  | 9.5  | 20                    | 15.5 | 60 | 9.5        | 5.8      | 8.5      |  |
| LSD20F1N   | 28                        | 6   | 59  | 19.5 | 65               | 72                      | 69.5                          | 48                     | 32 | 49 | 6.2 | 13 | M6X1.0  | 9.5  | 20                    | 15.5 | 60 | 9.5        | 5.8      | 8.5      |  |
| LSD25F1S   | 33                        | 7   | 73  | 25   | 59               | 66                      | 63.5                          | 36.5                   | -  | 60 | 7.2 | 13 | M8X1.25 | 10.5 | 23                    | 18   | 60 | 11.2       | 7        | 9        |  |
| LSD25F1N   | 33                        | 7   | 73  | 25   | 83               | 90                      | 87.5                          | 60.5                   | 35 | 60 | 7.2 | 13 | M8X1.25 | 10.5 | 23                    | 18   | 60 | 11.2       | 7        | 9        |  |
| LSD30F1S   | 42                        | 9   | 90  | 31   | 68.5             | 76.5                    | 73.5                          | 41.5                   | -  | 72 | 7.2 | 13 | M10X1.5 | 10.5 | 28                    | 23   | 80 | 11.2(14.2) | 7(9)     | 9(12)    |  |
| LSD30F1N   | 42                        | 9   | 90  | 31   | 97               | 105                     | 102                           | 70                     | 40 | 72 | 7.2 | 13 | M10X1.5 | 10.5 | 28                    | 23   | 80 | 11.2(14.2) | 7(9)     | 9(12)    |  |
| LSD35F1S   | 48                        | 11  | 100 | 33   | 73.5             | 81.5                    | 78.5                          | 46.5                   | -  | 82 | 8.5 | 13 | M10X1.5 | 13.5 | 34                    | 27.5 | 80 | 14.2       | 9        | 12       |  |
| LSD35F1N   | 48                        | 11  | 100 | 33   | 106.5            | 114.5                   | 111.5                         | 79.5                   | 50 | 82 | 8.5 | 13 | M10X1.5 | 13.5 | 34                    | 27.5 | 80 | 14.2       | 9        | 12       |  |

| Model\Item | Mounting Screw | Dynamic Load Rating(kN) | Static Load Rating(kN) | Static Rated Moment (kN.m) |      |      | Weight    |            |
|------------|----------------|-------------------------|------------------------|----------------------------|------|------|-----------|------------|
|            |                |                         |                        | MR                         | MP   | MV   | Block(kg) | Rail(kg/m) |
| LSD15F1S   | M4(M3)         | 5.0                     | 9.5                    | 0.07                       | 0.04 | 0.04 | 0.12      | 1.23       |
| LSD15F1N   | M4(M3)         | 8.9                     | 16.5                   | 0.12                       | 0.10 | 0.10 | 0.21      | 1.23       |
| LSD20F1S   | M5             | 7.2                     | 13.5                   | 0.13                       | 0.06 | 0.06 | 0.18      | 2.11       |
| LSD20F1N   | M5             | 12.1                    | 22.4                   | 0.20                       | 0.15 | 0.15 | 0.31      | 2.11       |
| LSD25F1S   | M6             | 11.5                    | 20.8                   | 0.22                       | 0.11 | 0.11 | 0.36      | 2.76       |
| LSD25F1N   | M6             | 19.3                    | 34.7                   | 0.36                       | 0.31 | 0.31 | 0.60      | 2.76       |
| LSD30F1S   | M6(M8)         | 19.8                    | 30.0                   | 0.38                       | 0.20 | 0.20 | 0.61      | 4.60       |
| LSD30F1N   | M6(M8)         | 28.3                    | 50.3                   | 0.65                       | 0.53 | 0.53 | 1.03      | 4.60       |
| LSD35F1S   | M8             | 29.2                    | 40.7                   | 0.66                       | 0.33 | 0.33 | 0.93      | 6.27       |
| LSD35F1N   | M8             | 42.7                    | 70.2                   | 1.02                       | 0.72 | 0.72 | 1.50      | 6.27       |


[Note]: The standard countersink of LSD15 rail is  $\Phi 8 \times 5.3 \times \Phi 4.8$  and with M4 screw. If with M3 screw, the ordering code should add "U", and the countersink is  $\Phi 6 \times 4.5 \times \Phi 3.5$ .  
The standard countersink of LSD30 rail is  $\Phi 11.2 \times 9 \times \Phi 7$  and with M6 screw. If with M8 screw, the ordering code should add "U", and the countersink is  $\Phi 14.2 \times 12 \times \Phi 9$ .

# Low Profile Type Linear Guide

## LSD Series

Flange type, Bottom-Mount

Flange type, Top or Bottom-Mount

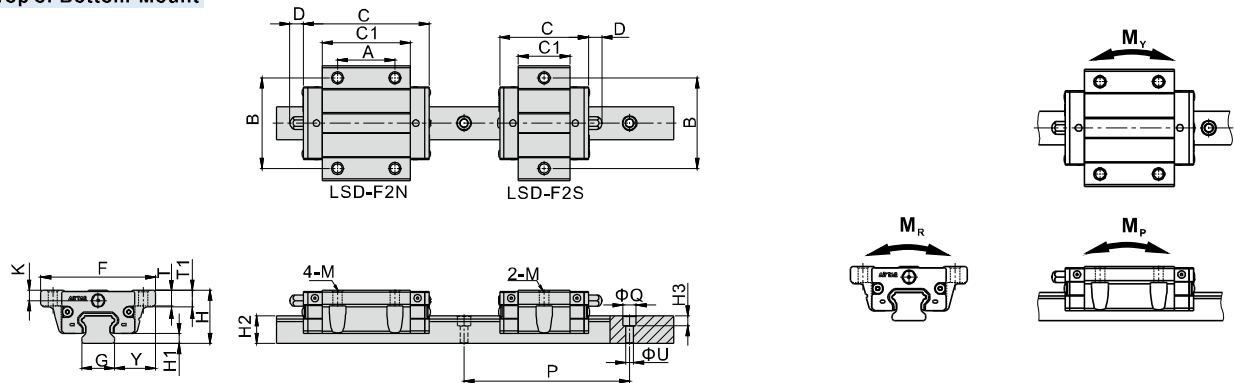

| Model\Item   | External Dimension ( mm ) |     |     |      |                     |                                |                                      | Block Dimension ( mm ) |    |    |     |    |                  |                            | Rail Dimension ( mm ) |      |    |      |    |              |              |              |
|--------------|---------------------------|-----|-----|------|---------------------|--------------------------------|--------------------------------------|------------------------|----|----|-----|----|------------------|----------------------------|-----------------------|------|----|------|----|--------------|--------------|--------------|
|              | H                         | H1  | F   | Y    | C                   |                                |                                      | C1                     | A  | B  | K   | D  | M                |                            | T                     | T1   | G  | H2   | P  | ΦQ<br>[Note] | ΦU<br>[Note] | H3<br>[Note] |
|              |                           |     |     |      | Standard<br>(Blank) | Double oil<br>scrapers<br>(DD) | Oil scraper<br>+Metal craper<br>(ZZ) |                        |    |    |     |    | Bottom-<br>Mount | Top or<br>Bottom-<br>Mount |                       |      |    |      |    |              |              |              |
|              |                           |     |     |      |                     |                                |                                      |                        |    |    |     |    |                  |                            |                       |      |    |      |    |              |              |              |
| LSD15F2(F3)S | 24                        | 4.5 | 52  | 18.5 | 40.5                | 47.5                           | 45                                   | 23.5                   | -  | 41 | 4.6 | 6  | Φ4.5             | M5X0.8                     | 7                     | 7.5  | 15 | 12.5 | 60 | 8(6)         | 4.8(3.5)     | 5.3(4.5)     |
| LSD15F2(F3)N | 24                        | 4.5 | 52  | 18.5 | 57                  | 64                             | 61.5                                 | 40                     | 26 | 41 | 4.6 | 6  | Φ4.5             | M5X0.8                     | 7                     | 7.5  | 15 | 12.5 | 60 | 8(6)         | 4.8(3.5)     | 5.3(4.5)     |
| LSD20F2(F3)S | 28                        | 6   | 59  | 19.5 | 46                  | 53                             | 50.5                                 | 29                     | -  | 49 | 6.2 | 13 | Φ5.7             | M6X1.0                     | 9                     | 9.5  | 20 | 15.5 | 60 | 9.5          | 5.8          | 8.5          |
| LSD20F2(F3)N | 28                        | 6   | 59  | 19.5 | 65                  | 72                             | 69.5                                 | 48                     | 32 | 49 | 6.2 | 13 | Φ5.7             | M6X1.0                     | 9                     | 9.5  | 20 | 15.5 | 60 | 9.5          | 5.8          | 8.5          |
| LSD25F2(F3)S | 33                        | 7   | 73  | 25   | 59                  | 66                             | 63.5                                 | 36.5                   | -  | 60 | 7.2 | 13 | Φ6.8             | M8X1.25                    | 10                    | 10.5 | 23 | 18   | 60 | 11.2         | 7            | 9            |
| LSD25F2(F3)N | 33                        | 7   | 73  | 25   | 83                  | 90                             | 87.5                                 | 60.5                   | 35 | 60 | 7.2 | 13 | Φ6.8             | M8X1.25                    | 10                    | 10.5 | 23 | 18   | 60 | 11.2         | 7            | 9            |
| LSD30F2(F3)S | 42                        | 9   | 90  | 31   | 68.5                | 76.5                           | 79.5                                 | 41.5                   | -  | 72 | 7.2 | 13 | Φ9               | M10X1.5                    | 10                    | 10.5 | 28 | 23   | 80 | 11.2(14.2)   | 7(9)         | 9(12)        |
| LSD30F2(F3)N | 42                        | 9   | 90  | 31   | 97                  | 105                            | 102                                  | 70                     | 40 | 72 | 7.2 | 13 | Φ9               | M10X1.5                    | 10                    | 10.5 | 28 | 23   | 80 | 11.2(14.2)   | 7(9)         | 9(12)        |
| LSD35F2(F3)S | 48                        | 11  | 100 | 33   | 73.5                | 81.5                           | 78.5                                 | 46.5                   | -  | 82 | 8.5 | 13 | Φ9               | M10X1.5                    | 13                    | 13.5 | 34 | 27.5 | 80 | 14.2         | 9            | 12           |
| LSD35F2(F3)N | 48                        | 11  | 100 | 33   | 106.5               | 114.5                          | 111.5                                | 79.5                   | 50 | 82 | 8.5 | 13 | Φ9               | M10X1.5                    | 13                    | 13.5 | 34 | 27.5 | 80 | 14.2         | 9            | 12           |


| Model\Item   | Mounting Screw | Dynamic Load Rating(kN) | Static Load Rating(kN) | Static Rated Moment (kN.m) |                |                | Weight    |            |
|--------------|----------------|-------------------------|------------------------|----------------------------|----------------|----------------|-----------|------------|
|              |                | C                       | C <sub>0</sub>         | M <sub>R</sub>             | M <sub>p</sub> | M <sub>y</sub> | Block(kg) | Rail(kg/m) |
| LSD15F2(F3)S | M4(M3)         | 5.0                     | 9.5                    | 0.07                       | 0.04           | 0.04           | 0.12      | 1.23       |
| LSD15F2(F3)N | M4(M3)         | 8.9                     | 16.5                   | 0.12                       | 0.10           | 0.10           | 0.21      | 1.23       |
| LSD20F2(F3)S | M5             | 7.2                     | 13.5                   | 0.13                       | 0.06           | 0.06           | 0.18      | 2.11       |
| LSD20F2(F3)N | M5             | 12.1                    | 22.4                   | 0.20                       | 0.15           | 0.15           | 0.31      | 2.11       |
| LSD25F2(F3)S | M6             | 11.5                    | 20.8                   | 0.22                       | 0.11           | 0.11           | 0.36      | 2.76       |
| LSD25F2(F3)N | M6             | 19.3                    | 34.7                   | 0.36                       | 0.31           | 0.31           | 0.60      | 2.76       |
| LSD30F2(F3)S | M6(M8)         | 19.8                    | 30.0                   | 0.38                       | 0.20           | 0.20           | 0.61      | 4.60       |
| LSD30F2(F3)N | M6(M8)         | 28.3                    | 50.3                   | 0.65                       | 0.53           | 0.53           | 1.03      | 4.60       |
| LSD35F2(F3)S | M8             | 29.2                    | 40.7                   | 0.66                       | 0.33           | 0.33           | 0.93      | 6.27       |
| LSD35F2(F3)N | M8             | 42.7                    | 70.2                   | 1.02                       | 0.72           | 0.72           | 1.50      | 6.27       |

[Note]: The standard countersink of LSD15 rail is Φ8X5.3XΦ4.8 and with M4 screw. If with M3 screw, the ordering code should add "U", and the countersink is Φ6X4.5XΦ3.5.  
The standard countersink of LSD30 rail is Φ11.2X9XΦ7 and with M6 screw. If with M8 screw, the ordering code should add "U", and the countersink is Φ14.2X12XΦ9.

# Low Profile Type Linear Guide

## LSD Series

### Dimension of bottom-mount type rail

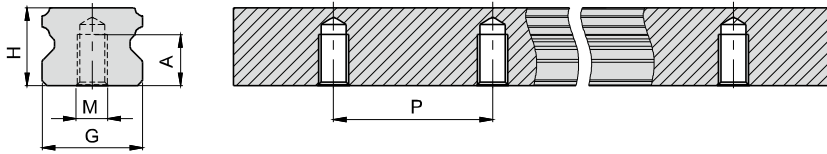

| Model/Item | G  | H    | M       | A  | P  |
|------------|----|------|---------|----|----|
| LSD15T     | 15 | 12.5 | M5X0.8  | 7  | 60 |
| LSD20T     | 20 | 15.5 | M6X1.0  | 9  | 60 |
| LSD25T     | 23 | 18   | M6X1.0  | 10 | 60 |
| LSD30T     | 28 | 23   | M8X1.25 | 14 | 80 |
| LSD35T     | 34 | 27.5 | M8X1.25 | 17 | 80 |

## Accuracy Classes

LSD Low Profile type linear guide comes with 3 accuracy levels.


|  <p>The identification line of the Datum</p> | Accuracy Standards (mm) |                                           |            |          |         |          |              |          |
|-------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------|------------|----------|---------|----------|--------------|----------|
|                                                                                                                               | Accuracy                |                                           | N : Normal |          | H: High |          | P: Precision |          |
|                                                                                                                               | Model                   |                                           | 15/20      | 25/30/35 | 15/20   | 25/30/35 | 15/20        | 25/30/35 |
|                                                                                                                               | Tolerance of height H   |                                           | ±0.1       |          | ±0.03   | ±0.04    | ±0.015       | ±0.02    |
|                                                                                                                               | Variation of height ΔH  |                                           | 0.02       | 0.025    | 0.01    | 0.015    | 0.006        | 0.007    |
| Tolerance of width Y                                                                                                          |                         | ±0.1                                      |            | ±0.03    | ±0.04   | ±0.015   | ±0.02        |          |
| Variation of width ΔY                                                                                                         |                         | 0.02                                      | 0.03       | 0.01     | 0.015   | 0.006    | 0.007        |          |
| Parallelism of C-surface relative to A-surface                                                                                |                         | Parallelism of raceway (Refer to Table 1) |            |          |         |          |              |          |
| Parallelism of D-surface relative to B-surface                                                                                |                         | Parallelism of raceway (Refer to Table 1) |            |          |         |          |              |          |

Table 1 : Parallelism of the raceway


| Accuracy Rail Length(mm) | Parallelism of the raceway( $\mu m$ ) |    |    |
|--------------------------|---------------------------------------|----|----|
|                          | N                                     | H  | P  |
| 100 under                | 12                                    | 7  | 3  |
| 100~200                  | 14                                    | 9  | 4  |
| 200~300                  | 15                                    | 10 | 5  |
| 300~500                  | 17                                    | 12 | 6  |
| 500~700                  | 20                                    | 13 | 7  |
| 700~900                  | 22                                    | 15 | 8  |
| 900~1100                 | 24                                    | 16 | 9  |
| 1100~1500                | 26                                    | 18 | 11 |
| 1500~1900                | 28                                    | 20 | 13 |
| 1900~2500                | 31                                    | 22 | 15 |
| 2500~3100                | 33                                    | 25 | 18 |
| 3100~3600                | 36                                    | 27 | 20 |
| 3600~4000                | 37                                    | 28 | 21 |

## Preload Level

### 1. Preload interference

The LSD Low Profile type Linear Guide has three preload categories: A, B and C.

Choosing suitable preload level will enhance rigidity, precision and torsion resistant performance of the linear guide.



| Model | Radial interference( $\mu m$ ) |                  |                   |
|-------|--------------------------------|------------------|-------------------|
|       | Standard clearance(A)          | Light Preload(B) | Middle Preload(C) |
| LSD15 | -4~+2                          | -12~-4           | -22~-14           |
| LSD20 | -5~+2                          | -13~-5           | -23~-15           |
| LSD25 | -6~+2                          | -14~-6           | -24~-16           |
| LSD30 | -7~+2                          | -16~-7           | -29~-20           |
| LSD35 | -8~+2                          | -21~-11          | -34~-24           |

### 2. Common Application

Refer to following table for suitable application of different preload grade:

| Preload grade         | Requirement                                                                 | Common Application                                                                                                                                             |
|-----------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard clearance(A) | One axial movement, small vibration and impact, accuracy requirement is low | Conveyor Machine, Semiconductor Equipment, Stage Equipment, Press Machine, Welding Machine and other light movement equipments                                 |
| Light Preload(B)      | Equipment that requires light-load and high-precision.                      | Z-axis movement for industrial use, NC lathe, EDM, Precision XY platform, Vertical machine center, measurement instrument, material feeder or industrial robot |
| Medium Preload(C)     | Equipment that requires high rigidity, large vibration and shock.           | Machining centers, NC lathes, grinders, vertical or horizontal milling machines, boring machines, tool guides, heavy cutting machines.                         |


# Low Profile Type Linear Guide

## LSD Series

### Installation Illustration

#### 1. Allowable tolerance of mounting surface

LSD series is an arc-shape, two-point contact design of linear guide. Its self-centering feature allows some tolerance on mounting surface without affecting the smoothness of linear motion. The allowable tolerance is indicated in following table:

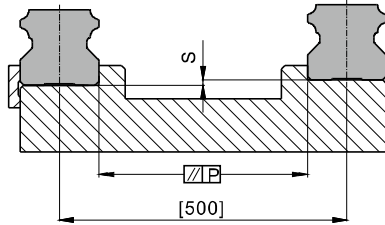


| Model | Allowable tolerance of parallelism P(μm) |                  |                   | Allowable tolerance of top and bottom S (μm) |                  |                   |
|-------|------------------------------------------|------------------|-------------------|----------------------------------------------|------------------|-------------------|
|       | Standard clearance(A)                    | Light Preload(B) | Medium Preload(C) | Standard clearance(A)                        | Light Preload(B) | Medium Preload(C) |
| LSD15 | 25                                       | 18               | -                 | 130                                          | 85               | -                 |
| LSD20 | 25                                       | 20               | 18                | 130                                          | 85               | 50                |
| LSD25 | 30                                       | 22               | 20                | 130                                          | 85               | 70                |
| LSD30 | 40                                       | 30               | 27                | 170                                          | 110              | 90                |
| LSD35 | 50                                       | 35               | 30                | 210                                          | 150              | 120               |

Note: The value in the table is the allowable value when the distance between the two linear guides is 500mm, and the allowable value is proportional to the distance between the two linear guides.

#### 2. Height and Chamfer of Reference Edge

In order to ensure accurate installation of LSD Linear Guide, the contact space should not exceed the given figures in following table.

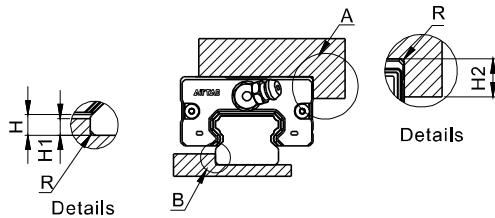

Unit : mm

| Model | H   | H1  | H2  | R(Max) |
|-------|-----|-----|-----|--------|
| LSD15 | 4.5 | 2.7 | 5   | 0.5    |
| LSD20 | 6   | 5   | 7   | 0.5    |
| LSD25 | 7   | 5   | 7.5 | 1      |
| LSD30 | 9   | 7   | 7   | 1      |
| LSD35 | 11  | 7.5 | 9.5 | 1      |

#### 3. Screw Tighten Torque

When installing linear guide, whether the screws are well tighten and surface is well contacted will affect accuracy significantly. Please refer to following table for tightening force to ensure a perfect installation.

| Model | Screw size | Tighten Torque(N.cm) |         |                |
|-------|------------|----------------------|---------|----------------|
|       |            | Iron                 | Casting | Aluminum alloy |
| LSD15 | M3         | 196                  | 127     | 98             |
|       | M4         | 412                  | 274     | 206            |
| LSD20 | M5         | 882                  | 588     | 441            |
| LSD25 | M6         | 1370                 | 921     | 686            |
| LSD30 | M6         | 1370                 | 921     | 686            |
|       | M8         | 3040                 | 2010    | 1470           |
| LSD35 | M8         | 3040                 | 2010    | 1470           |

#### 4. Installation and Application

Linear guide installation methods can be divided into the followings.

For installations other than forward installation, the lubricant may fail.


| Forward use | Inverted use | Vertical use | Wall-mounted use |
|-------------|--------------|--------------|------------------|
|             |              |              |                  |
| Slopy use   |              |              |                  |
|             |              |              |                  |

# Low Profile Type Linear Guide

## LSD Series

### 5. Datum plane


- Datum plane for installation must be ground or finely milled to ensure accuracy.
- Both sides of Rail can be used as the datum plane.
- For multi-blocks on a rail, identification line on blocks should be put on the same side to ensure moving accuracy.

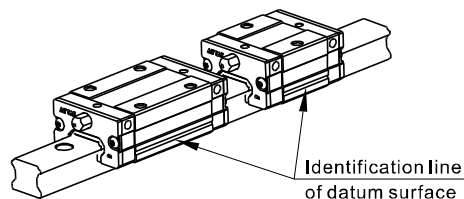

### 6. Fixation Method

Rails and blocks are possible to be displaced while the machine is subjected to vibrations and impacts thus to affect the accuracy.


In order to avoid those difficulties and achieve high running accuracy, the following four methods are recommended for fixing.

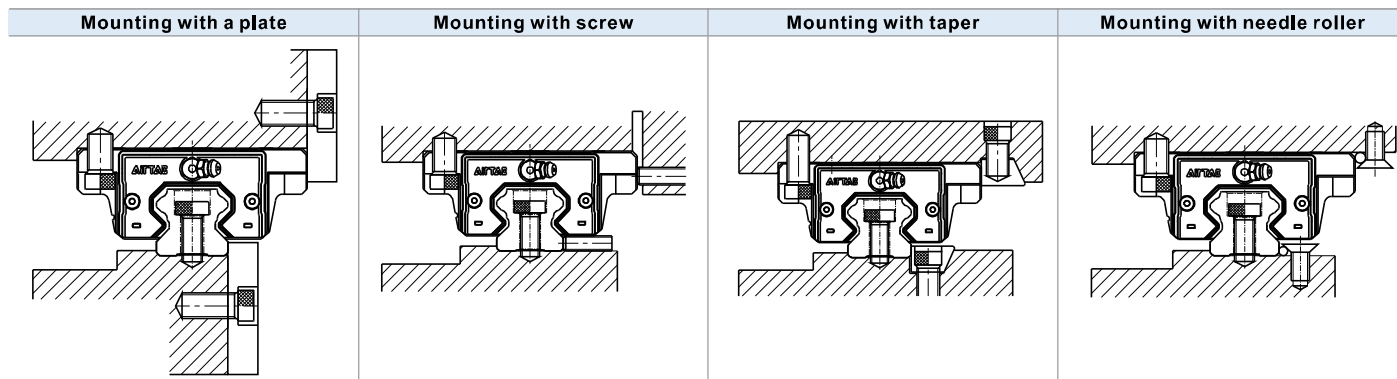


### 7. Rail Installation

A. Before installing the rail, remove all dirt from the mounting surface with oil stone, and then wipe with a clean cloth.

Remove all dirt from the mounting surface with oil stone, and then wipe with a clean cloth

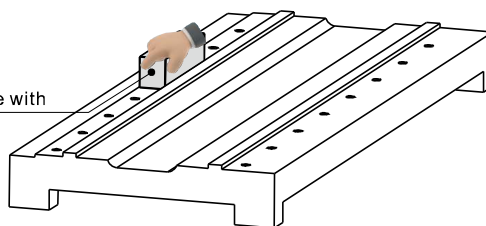

B. Place the rail gently on the bed firstly, then put the bolts into the mounting holes and pre-tighten them, place the rail ① into close contact with the datum plane of the bed by using the baffle, tighten the bolts with appropriate torque to fix the rail. Refer to "3. Screw tighten torque" for recommended torque value.


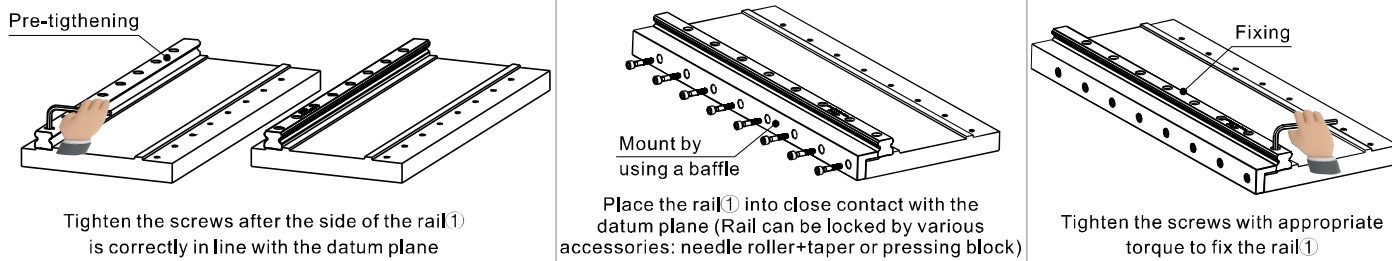


### 8. Block Installation

- Temporarily fix the table on the block by using the mounting bolts.
- Push the block datum plane against the side datum plane of the table and position the block by tightening the set screws.
- Tighten the mounting bolts in 1 to 4 sequences to fix the table on the block.

### 9. Subsidiary Rail Installation

Under the condition that the subsidiary rail has a reference datum plane, remove all dirt from the mounting surface with oil stone, and then wipe with a clean cloth, mount the subsidiary rail ② with the same method of the master rail ①.

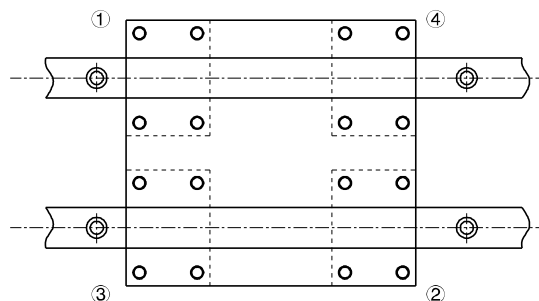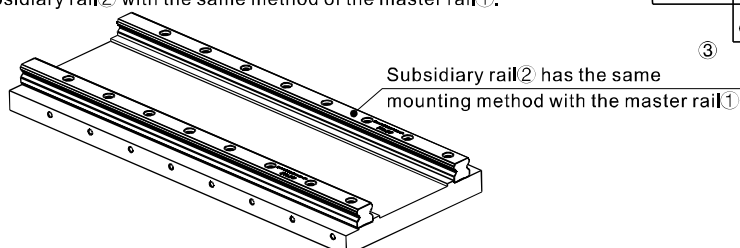

Under the condition that the subsidiary rail ② has a reference datum plane, remove all dirt from the mounting surface with oil stone, and then wipe with a clean cloth,


# Low Profile Type Linear Guide

## LSD Series

### 10. Rail Installation without Side Datum Surface


#### Using a provisional datum plane

Use the datum plane provided on the bed for straight alignment of the rail from one end to the other, attention must be paid to fix two blocks in close contact on the measuring plate.

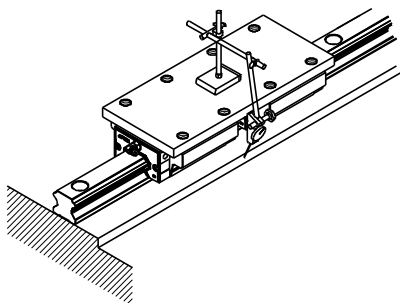


#### Using a straight-edge

Put the straight-edge between the two rails and use a dial gauge to adjust straight-edge in parallel with the side datum plane of the master rail. Use the dial gauge to ensure the straightness of the subsidiary rail by using the straight-edge as reference, then tighten the mounting bolts in proper sequence when the subsidiary rail is parallel to the master rail.

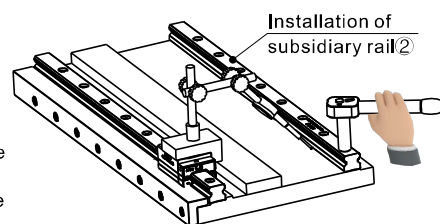

### 11. Rail Installation without Set Screws


To ensure parallelism between the subsidiary rail and the master rail in the condition without set screws, the following installation methods are recommended, and the installation of the block is the same as mentioned previously.

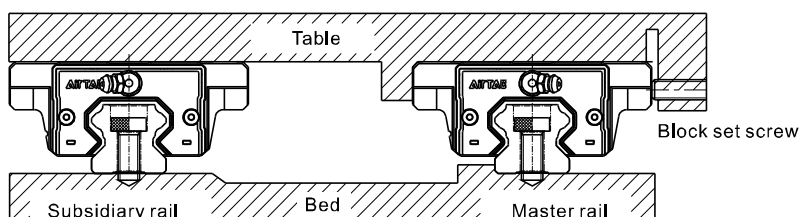

#### Installation of the master rail

##### Using a vice


Put the rail on the bed mounting surface and temporarily fasten the mounting bolts, then push the rail against the side datum plane of the bed by using a vice to ensure the rail position. Tighten the mounting bolts in proper sequence with specific torque.

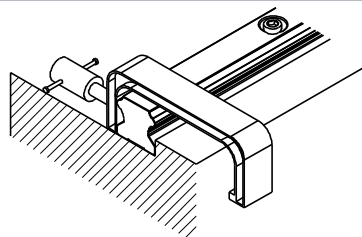

#### Installation of the subsidiary rail


##### Using a straight-edge

Put the straight-edge between the two rails and use a dial gauge to adjust straight-edge in parallel with the side datum plane of the master rail. Use the straight-edge to ensure the straightness of the subsidiary rail, then tighten the mounting bolts in proper sequence with specific torque.

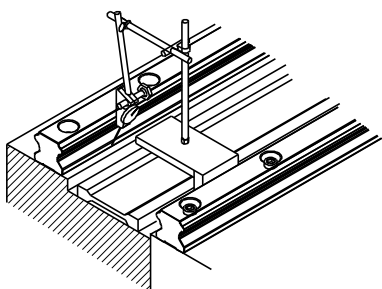


##### Using a table

Fix two blocks on the master rail to the table, and temporarily fix the subsidiary rail to the bed and one block on the subsidiary rail to the table. Place the gauge against the side surface of the block on the subsidiary rail, move the table from one end of the rail to the other end, then tighten the mounting bolts in proper sequence with specific torque while aligning the subsidiary rail parallel to the master rail.

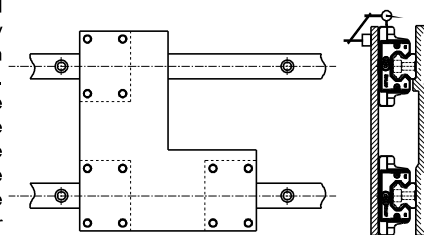


##### Following the master rail

Fix the table to the two blocks on the master rail and one of the two blocks on the subsidiary rail, temporarily fix the other block on the subsidiary rail to the table and subsidiary rail to the bed. Moving the table from one end of the master rail and tighten the mounting bolts on the subsidiary rail in proper sequence with specific torque at the same time.

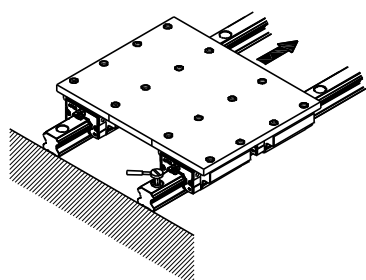

##### Using a jig


Use a special jig to help ensure the position of the subsidiary rail, and tighten the mounting bolts in proper sequence with specific torque.

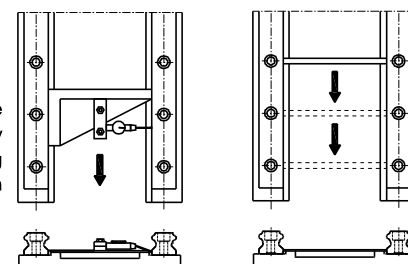


## LSD Series

### 12. Rail Butt-jointed


- When it comes to butt-jointed rail installation, it must follow the butt-jointed marks shown below.
- In order to avoid the accuracy caused by installing the matched jointed rails, it is recommended to stagger the butt-jointed positions, see figure below.

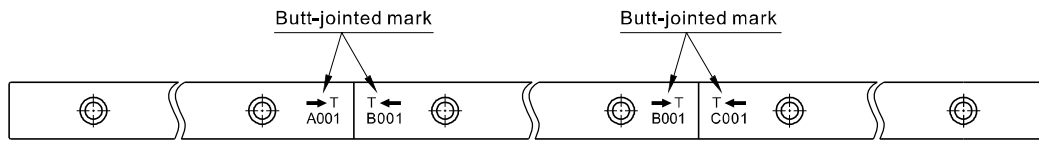

- When jointing rails, it must follow group marks on rail to ensure the accuracy of linear guide. These marks are located on the top surface at joint side. Please put the same group marks together.

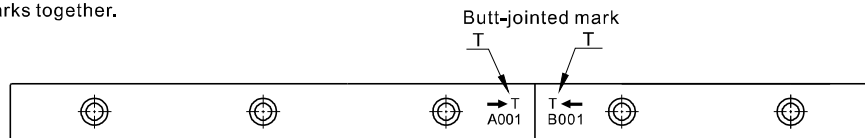


- Be aware serial number of group mark when assemble. A001 and B001 are in a group, so as to A002 and B002 and so on.
- Be aware the installation direction while assembly, the serial numbers are not upside down and arrows point to each other.

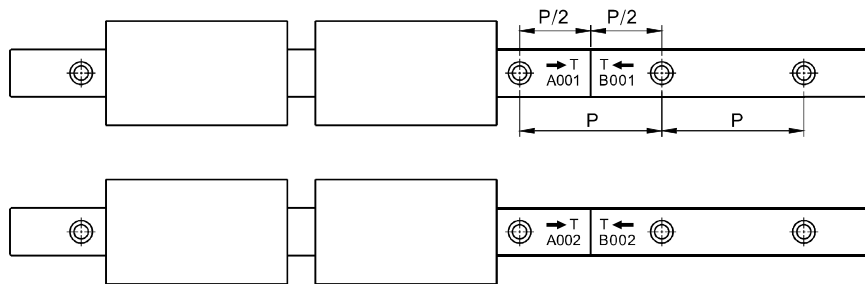


### 13. Measurement Method after Installation

When measuring running accuracy of the block, two blocks should be fixed on an inspection table in close contact to obtain stable accuracy.

When using a dial gauge, a provisional benchmark (like a straight-edge) is recommended to put as close as possible to the block for accurate measurement.

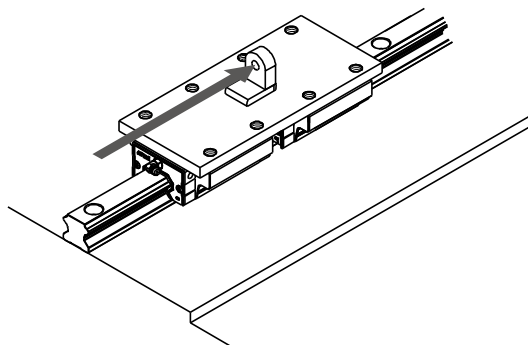

Method using an autocollimator

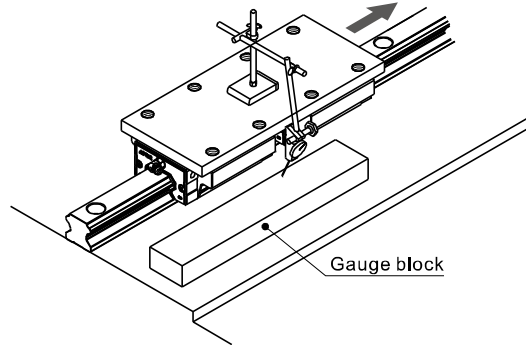

Method using a dial gauge

# Low Profile Type Linear Guide

## LSD Series

### Lubrication method

When a linear guide is well lubricated, it can reduce wear and increase lifespan significantly. Lubrication has the following benefits :

- Reduces friction of the rollers and raceway to minimize wear.
- The grease film between contact surface can prevent roller fatigue.
- Prevent rust.

#### 1. Lubrication Grease

Use the correct grade of lubrication. While lubricating, a grease gun can be used to pump grease into slider through the grease nipple on it. The suitable condition for lube is when working speed is under 60 m/min and not in cooling process.

##### •Nipple type

|                    | L-P-M4 | L-P-M6 | L-P-SM6 |
|--------------------|--------|--------|---------|
| Grease nipple type |        |        |         |

##### •Grease amount

LSD series linear guide is well lubricated with 'Mobilith EP2' in factory. Customers are recommended to use identical or the same grade of lubricant. After lubrication, block needs to be moved back and forth at least three times for the length of three blocks and repeat at least twice. Check if the surface of rail is well covered by grease film.

| Model | Grease amount for the first lubrication(cm <sup>3</sup> ) |               | Replenishment amount(cm <sup>3</sup> ) |               |
|-------|-----------------------------------------------------------|---------------|----------------------------------------|---------------|
|       | Short type                                                | Standard type | Short type                             | Standard type |
| LSD15 | 0.5                                                       | 0.9           | 0.2                                    | 0.3           |
| LSD20 | 1.1                                                       | 1.8           | 0.4                                    | 0.6           |
| LSD25 | 1.8                                                       | 3.2           | 0.6                                    | 1.0           |
| LSD30 | 2.9                                                       | 4.5           | 0.9                                    | 1.4           |
| LSD35 | 4.1                                                       | 5.9           | 1.3                                    | 1.8           |

##### •Lubrication frequency

Although the linear guides are well lubricated at factory and retains grease well, frequent lubrication is still necessary to avoid undesirable wear. Recommended lubrication period is every 100km of movement or every 3~6 months. (Refer to table on the top for suggested amount)

#### 2. Lubricating oil

Recommended oil viscosity for lubrication use is about 30 to 150 cst.

Lubrication oil is suitable for all kinds of load and impact application, but not for high temperature use due to its tendency of vaporization.

##### •Adaptor

| L-P-AM6 | L-P-AM8                          | L-P-A01                          |
|---------|----------------------------------|----------------------------------|
|         |                                  |                                  |
| LSD15   | LSD35<br>LSD30<br>LSD25<br>LSD20 | LSD35<br>LSD30<br>LSD25<br>LSD20 |
| L-P-LM6 | L-P-LM8                          | L-P-L01                          |
|         |                                  |                                  |
| LSD15   | LSD35<br>LSD30<br>LSD25<br>LSD20 | LSD35<br>LSD30<br>LSD25<br>LSD20 |

Note: After installation, the top surface of adaptor may be higher than block. Be careful about the interference while moving.

# Low Profile Type Linear Guide

## LSD Series

### Lubrication method


#### •Oil supply rate

Loss of lubrication oil is faster than lubrication grease. Pay attention to sufficiency of oil while using.

| Model | Oil amount for the first lubrication(cm <sup>3</sup> ) | Feeding Speed(cm <sup>3</sup> /hr) |
|-------|--------------------------------------------------------|------------------------------------|
| LSD15 | 0.3                                                    | 0.1                                |
| LSD20 | 0.5                                                    | 0.15                               |
| LSD25 | 0.6                                                    | 0.2                                |
| LSD30 | 0.8                                                    | 0.25                               |
| LSD35 | 0.9                                                    | 0.3                                |

#### 3. Grease nipple/adaptor installation

- Grease nipple or adaptor can be installed in the two sides of block for manual or automatic lubrication based on customer's requirement.
- There are a secondary set of lubricating ports on the side of the block. When using, it is not recommended to use the side with datum line unless necessary.
- Lateral nipple installation is not recommended for flange type blocks.  
(The grease / oil nipple may interfere with block)
- If lateral lubrication is needed for above spec, please contact us for customization.

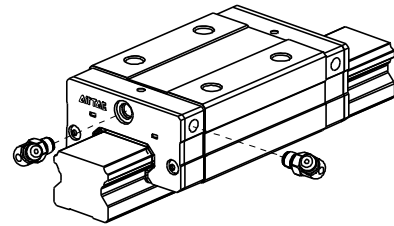


### Bolt hole plug

#### 1. Plug type


In order to prevent metal swarf or external objects from entering blocks and affecting precision and lifespan, customers must put plugs into holes during installation. Every rail is equipped with default plugs.

| Model | Bolt | Diameter(D)(mm) | Thickness(H)(mm) |
|-------|------|-----------------|------------------|
| LSD15 | M3   | 6.15            | 1.2              |
|       | M4   | 8.15            | 1.1              |
| LSD20 | M5   | 9.65            | 2.5              |
| LSD25 | M6   | 11.4            | 2.5              |
| LSD30 | M6   | 11.4            | 2.5              |
|       | M8   | 14.4            | 3.5              |
| LSD35 | M8   | 14.4            | 3.5              |




#### 2. Plug installation Steps

##### Step one

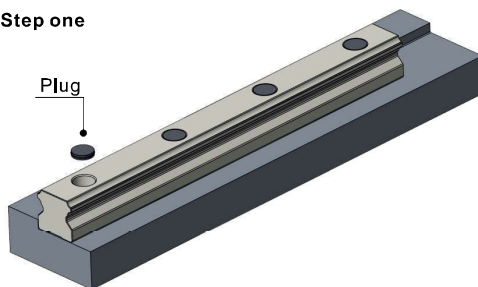

Place the plug in counterbore.

##### Step two

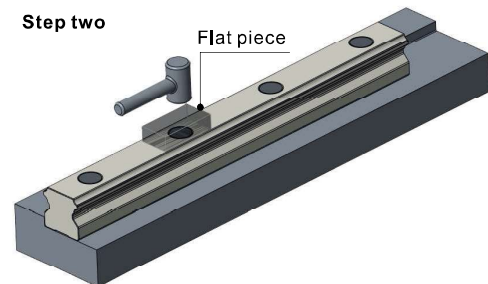

Place the flat piece on mounting hole, hit the piece vertically with a plastic hammer and fix the plug into counterbore.

Note :

- Please make sure the plugs do not protrude the rail surface.
- After installation, please clean the surface before use.

# Dustproof standard type linear guide

## LSD Series



### Order Information(Combined)

#### 1、LSD15/30

LSD □ 15 H N 1 X220 S20 A H-U-AM6-B-T-DD

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮

|                                   |                                                                                                                                               |           |                                                                         |            |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------|------------|
| ① Model Code                      | LSD:Dustproof standard type linear guide                                                                                                      |           |                                                                         |            |
| ② Rail&Block surface treatment    | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                           |           |                                                                         |            |
| ③ Rail Width                      | 15:15mm    30:28mm                                                                                                                            |           |                                                                         |            |
| ④ Block Style                     | H: Square type    F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |           |                                                                         |            |
| ⑤ Block type                      | S: Short    N: Standard                                                                                                                       |           |                                                                         |            |
| ⑥ Number of Block                 | 1: One   2: Two [Note: Amount of block on a single set of linear guide]                                                                       |           |                                                                         |            |
| ⑦ Length of Rail                  | 220:220mm .....[Defined by customer]                                                                                                          |           |                                                                         |            |
| ⑧ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)                  |           |                                                                         |            |
| ⑨ Preload                         | A: Standard clearance   B: Light Preload   C: Medium Preload                                                                                  |           |                                                                         |            |
| ⑩ Accuracy                        | N : Normal    H : High    P : Precision                                                                                                       |           |                                                                         |            |
| ⑪ Rail type                       | LSD15:Blank: Top-mount(M4)<br>LSD30:Blank: Top-mount(M6)                                                                                      |           | LSD15:U: Top-mount(M3)<br>LSD30:U: Top-mount(M8)                        |            |
|                                   | LSD15<br>                                                                                                                                     | LSD30<br> | LSD15<br>                                                               | LSD30<br>  |
| ⑫ Nipple /adapter type            | LSD15: M4: M4 Nipple<br>LSD30: M6: M6 Nipple                                                                                                  |           | LSD15: AM6: M4 to M6<br>LSD30: A01: M6 to PT1/8<br>LSD30: AM8: M6 to M8 |            |
|                                   | M4<br>                                                                                                                                        | M6<br>    | I type<br>                                                              | L type<br> |
| ⑬ Packing type                    | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                               |           |                                                                         |            |
| ⑭ Rail type                       | Blank: Top-mount    T: Bottom-mount                                                                                                           |           |                                                                         |            |
| ⑮ Dust proof                      | DD: Double oil scrapers   ZZ: Oil scraper + metal scraper                                                                                     |           |                                                                         |            |

[Note1] For LSD-BB series, standard length of a rail is 3 m.

Please contact with our company if length of rail exceeds the maximum.

Add: Rail type indicated in ⑪ and ⑫ in ordering code cannot be selected at the same time, only one of them can be selected.

# Dustproof standard type linear guide

## LSD Series

### 2、LSD20/25/35

LSD □ 20 H N 1 X220 S20 A H - AM8-B - T-DD

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

|                                   |                                                                                                                                               |                                                                                             |                                                                                             |                                                                                          |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| ① Model Code                      | LSD:Dustproof standard type linear guide                                                                                                      |                                                                                             |                                                                                             |                                                                                          |
| ② Rail&Block surface treatment    | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                           |                                                                                             |                                                                                             |                                                                                          |
| ③ Rail Width                      | 20:20mm    25:23mm    35:34mm                                                                                                                 |                                                                                             |                                                                                             |                                                                                          |
| ④ Block Style                     | H: Square type    F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |                                                                                             |                                                                                             |                                                                                          |
| ⑤ Block type                      | S: Short    N: Standard                                                                                                                       |                                                                                             |                                                                                             |                                                                                          |
| ⑥ Number of Block                 | 1: One    2: Two [Note: Amount of block on a single set of linear guide]                                                                      |                                                                                             |                                                                                             |                                                                                          |
| ⑦ Length of Rail                  | 220:220mm .....[Defined by customer]                                                                                                          |                                                                                             |                                                                                             |                                                                                          |
| ⑧ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)                  |                                                                                             |                                                                                             |                                                                                          |
| ⑨ Preload                         | A: Standard clearance    B: Light Preload    C: Medium Preload                                                                                |                                                                                             |                                                                                             |                                                                                          |
| ⑩ Accuracy                        | N : Normal    H : High    P : Precision                                                                                                       |                                                                                             |                                                                                             |                                                                                          |
| ⑪ Nipple /adapter type            | M6:M6 Nipple                                                                                                                                  | A01:M6 to PT1/8<br>AM8:M6 to M8                                                             | L01:M6 to PT1/8<br>LM8:M6 to M8                                                             | SM6: M6 Nipple                                                                           |
|                                   |                                                             | I type  | L type  | SM6  |
| ⑫ Packing type                    | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                               |                                                                                             |                                                                                             |                                                                                          |
| ⑬ Rail type                       | Blank: Top-mount    T: Bottom-mount                                                                                                           |                                                                                             |                                                                                             |                                                                                          |
| ⑭ Dust proof                      | DD: Double oil scrapers    ZZ: Oil scraper + metal scraper                                                                                    |                                                                                             |                                                                                             |                                                                                          |

[Note1] For LSD-BB series, standard length of a rail is 3 m.  
Please contact with our company if length of rail exceeds the maximum.

# Dustproof standard type linear guide

## LSD Series

### Butt-jointed Order Information

#### 1、LSD15/30

LSD ☐ 15 H N 1X2970 T 2940T2970 A H-U-AM6-B -T -DD

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Butt-jointed end margin:1/2P ,  
Position of the first and last  
hole is defined by customer.

|                                |                                                                                                                                            |       |                         |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------|
| ① Model Code                   | LSD:Dustproof standard type linear guide                                                                                                   |       |                         |
| ② Rail&Block surface treatment | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                        |       |                         |
| ③ Rail Width                   | 15:15mm 30:28mm                                                                                                                            |       |                         |
| ④ Block Style                  | H: Square type F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |       |                         |
| ⑤ Block type                   | S: Short N: Standard                                                                                                                       |       |                         |
| ⑥ Number of Block              | 1: One<br>2: Two [Note: Amount of block on a single set of linear guide]                                                                   |       |                         |
| ⑦ Length of first Rail         | 2970:2970mm .....[Defined by customer]                                                                                                     |       |                         |
| ⑧ Butt-jointed mark            | T: Rail Butt-jointed mark(Butt-jointed end margin:1/2P)<br>[P is the standard hole distance]                                               |       |                         |
| ⑨ Length of second Rail        | 2940:2940mm .....[Defined by customer]                                                                                                     |       |                         |
| ⑩ Butt-jointed mark            | Blank: two rails joint T: Rail Butt-jointed mark<br>(Butt-jointed end margin:1/2P) [P is the standard hole distance]                       |       |                         |
| ⑪ Length of third Rail         | Blank: two rails joint<br>2970:2970mm..[Defined by the customer]                                                                           |       |                         |
| ⑫ Preload                      | A: Standard clearance B: Light Preload C: Medium Preload                                                                                   |       |                         |
| ⑬ Accuracy                     | N : Normal H : High                                                                                                                        |       |                         |
| ⑭ Rail type                    | LSD15:Blank: Top-mount(M4) LSD15:U: Top-mount(M3)                                                                                          |       |                         |
|                                | LSD30:Blank: Top-mount(M6) LSD30:U: Top-mount(M8)                                                                                          |       |                         |
|                                | LSD15                                                                                                                                      | LSD30 | LSD15 LSD30             |
|                                |                                                                                                                                            |       |                         |
| ⑮ Nipple /adapter type         | LSD15: M4: M4 Nipple LSD15: AM6: M4 to M6                                                                                                  |       | LSD15: LM6: M4 to M6    |
|                                | LSD30: M6: M6 Nipple LSD30: A01: M6 to PT1/8                                                                                               |       | LSD30: L01: M6 to PT1/8 |
|                                | LSD30: AM8: M6 to M8                                                                                                                       |       | LSD30: LM8: M6 to M8    |
|                                | M4 M6 I type L type SM6                                                                                                                    |       |                         |
| ⑯ Packing type                 | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                            |       |                         |
| ⑰ Rail type                    | Blank: Top-mount T: Bottom-mount                                                                                                           |       |                         |
| ⑱ Dust proof                   | DD: Double oil scrapers ZZ: Oil scraper + metal scraper                                                                                    |       |                         |

- [Note1] For LSD-BB series, standard length of a rail is 3 m.  
Maximum length of two-joint rail is 6 m.  
Maximum length of three-joint rail is 9 m.  
Please contact with our company if length of rail exceeds the maximum.
- Add 1: Number of joints cannot be more than 2 times(three rails at most).  
For LSD15, maximum length of jointed rail is 12080mm.  
For LSD30, it's 12030.  
Customization is needed for joint times more than standard.
- Add2 :Rail type indicated in ⑭ and ⑮ in ordering code cannot be selected at the same time, only one of them can be selected.

# Dustproof standard type linear guide

## LSD Series

### 2、LSD20/25/35

LSD □ 20 H N 1X2970T2940T2970A H-AM8-B-T-DD

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

Butt-jointed end margin: 1/2P ,  
Position of the first and last  
hole is defined by customer.

|                                |                                                                                                                                                 |                                                                                              |                                                                                              |                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| ① Model Code                   | LSD:Dustproof standard type linear guide                                                                                                        |                                                                                              |                                                                                              |                                                                                           |
| ② Rail&Block surface treatment | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                             |                                                                                              |                                                                                              |                                                                                           |
| ③ Rail Width                   | 20:20mm                                                                                                                                         | 25:23mm                                                                                      | 35:34mm                                                                                      |                                                                                           |
| ④ Block Style                  | H: Square type      F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |                                                                                              |                                                                                              |                                                                                           |
| ⑤ Block type                   | S: Short    N: Standard                                                                                                                         |                                                                                              |                                                                                              |                                                                                           |
| ⑥ Number of Block              | 1: One    2: Two [Note: Amount of block on a single set of linear guide]                                                                        |                                                                                              |                                                                                              |                                                                                           |
| ⑦ Length of first Rail         | 2970:2970mm .....[Defined by customer]                                                                                                          |                                                                                              |                                                                                              |                                                                                           |
| ⑧ Butt-jointed mark            | T: Rail Butt-jointed mark<br>(Butt-jointed end margin:1/2P) [P is the standard hole distance]                                                   |                                                                                              |                                                                                              |                                                                                           |
| ⑨ Length of second Rail        | 2940:2940mm .....[Defined by customer]                                                                                                          |                                                                                              |                                                                                              |                                                                                           |
| ⑩ Butt-jointed mark            | Blank: two rails joint    T: Rail Butt-jointed mark<br>(Butt-jointed end margin:1/2P) [P is the standard hole distance]                         |                                                                                              |                                                                                              |                                                                                           |
| ⑪ Length of third Rail         | Blank: two rails joint    2970:2970mm..[Defined by the customer]                                                                                |                                                                                              |                                                                                              |                                                                                           |
| ⑫ Preload                      | A: Standard clearance    B: Light Preload    C: Medium Preload                                                                                  |                                                                                              |                                                                                              |                                                                                           |
| ⑬ Accuracy                     | N : Normal    H : High                                                                                                                          |                                                                                              |                                                                                              |                                                                                           |
| ⑭ Nipple /adapter type         | M6: M6 Nipple                                                                                                                                   | A01: M6 to PT1/8<br>AM8: M6 to M8                                                            | L01: M6 to PT1/8<br>LM8: M6 to M8                                                            | SM6: M6 Nipple                                                                            |
|                                |                                                             | I type  | L type  | SM6  |
| ⑮ Packing type                 | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                                 |                                                                                              |                                                                                              |                                                                                           |
| ⑯ Rail type                    | Blank: Top-mount    T: Bottom-mount                                                                                                             |                                                                                              |                                                                                              |                                                                                           |
| ⑰ Dust proof                   | DD: Double oil scrapers    ZZ: Oil scraper + metal scraper                                                                                      |                                                                                              |                                                                                              |                                                                                           |

[Note1] For LSD-BB series, standard length of a rail is 3 m.  
Maximum length of two-joint rail is 6 m.  
Maximum length of three-joint rail is 9 m.  
Please contact with our company if length of rail exceeds the maximum.  
Add: Number of joints cannot be more than 2 times(three rails at most).  
For LSD20/25, maximum length of jointed rail is 12080mm.  
For LSD35, it's 12030.  
Customization is needed for joint times more than standard.


# Dustproof standard type linear guide

## LSD Series


### 1. Block Order Information

LSD □ 15 BK - H N - H - E - AM6-DD

1 2 3 4 5 6 7 8 9 10



S: Short



N: Standard

|                        |                                                                                                                                                 |         |           |                                                                                            |         |     |             |                                                                                            |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|--------------------------------------------------------------------------------------------|---------|-----|-------------|--------------------------------------------------------------------------------------------|
| ① Model Code           | LSD:Dustproof standard type linear guide                                                                                                        |         |           |                                                                                            |         |     |             |                                                                                            |
| ② Coating on block     | Blank: Block without additional coating. (natural color)<br>★B: Block coated with black chrome                                                  |         |           |                                                                                            |         |     |             |                                                                                            |
| ③ Rail Width           | 15:15mm                                                                                                                                         | 20:20mm | 25:23mm   | 30:28mm                                                                                    | 35:34mm |     |             |                                                                                            |
| ④ Block Code           | BK: Block                                                                                                                                       |         |           |                                                                                            |         |     |             |                                                                                            |
| ⑤ Block Style          | H: Square type      F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |         |           |                                                                                            |         |     |             |                                                                                            |
| ⑥ Block type           | S: Short      N: Standard                                                                                                                       |         |           |                                                                                            |         |     |             |                                                                                            |
| ⑦ Accuracy             | N : Normal      H : High                                                                                                                        |         |           |                                                                                            |         |     |             |                                                                                            |
| ⑧ Group code           | SA   SB   SC   C   E [Note]                                                                                                                     |         |           |                                                                                            |         |     |             |                                                                                            |
| ⑨ Nipple /adapter type | 15                                                                                                                                              | M4      | M4 Nipple |         |         | M6  | M6 Nipple   |         |
|                        |                                                                                                                                                 | AM6     | M4 to M6  | I type  | 20      | A01 | M6 to PT1/8 | I type  |
|                        |                                                                                                                                                 |         |           |                                                                                            | 25      | AM8 | M6 to M8    |                                                                                            |
|                        |                                                                                                                                                 |         |           | L type                                                                                     | 30      | L01 | M6 to PT1/8 | L type  |
|                        |                                                                                                                                                 |         |           |         | 35      | LM8 | M6 to M8    |                                                                                            |
|                        |                                                                                                                                                 | LM6     | M4 to M6  |                                                                                            |         | SM6 | M6 Nipple   |         |
| ⑩ Dust proof           | DD: Double oil scrapers      ZZ: Oil scraper + metal scraper                                                                                    |         |           |                                                                                            |         |     |             |                                                                                            |

[Note] When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".




# Low Profile Type Linear Guide

## LSD Series

### Dust prevention illustration

#### 1. Code and structure

AirTAC provides the following dust prevention accessories for the linear guides working in dusty environment, if the following accessories are demanded, please add the corresponding code when ordering.
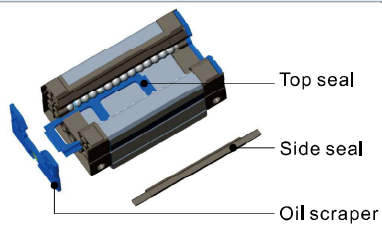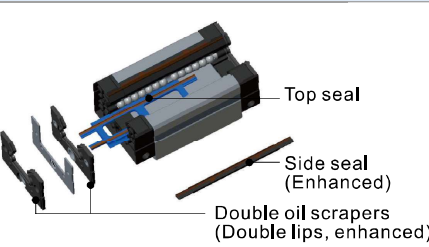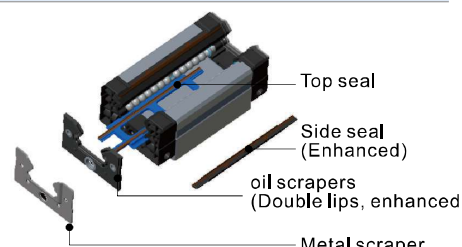
| Code      | Blank: Standard                                                                                                                 | DD: Double oil scrapers                                                                                                                                                     | ZZ: Metal scraper + Oil scraper                                                                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Structure |  <p>Top seal<br/>Side seal<br/>Oil scraper</p> |  <p>Top seal<br/>Side seal (Enhanced)<br/>Double oil scrapers (Double lips, enhanced)</p> |  <p>Top seal<br/>Side seal (Enhanced)<br/>oil scrapers (Double lips, enhanced)<br/>Metal scraper</p> |

#### 2. Test for high dust prevention

##### 2.1. Test item

| Test medium      | Wood chip | Iron filing | Gravel |
|------------------|-----------|-------------|--------|
| Running distance | 500km     | 500km       | 500km  |

##### 2.2. Test equipment

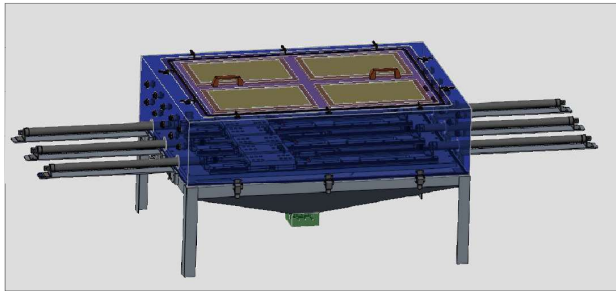


Figure1: Dust tester (Appearance)



Figure2: Dust tester (Inside)

##### 2.3. Test condition

AirTAC adopts the industry's first dust tester (Figure 1) to simulate real working conditions, 360° without dead angles, all-round dust invasion (Figure 2). The dustproof test simulates multiple application scenarios, fully fill the air with wood chips, iron filings and gravels and are strictly tested to ensure the quality and dustproof effect of each block.

##### 2.4. Test result

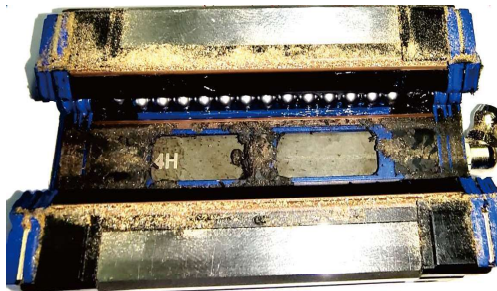


Figure3: Steel balls




Figure4: Steel balls

Result: It can be seen from the Figure 3 and 4 that little amount of dust enters the inside of the block after testing, and the steel ball surface is still smooth, the block still runs smoothly and the performance is not affected.

Note: The above test results are obtained from AirTAC lab.

#### 3. Dimensions

Highly dustproof type blocks have different length compared with the standard blocks (only dimension C is different from the standard, the others keep same), see the table on the right for details.

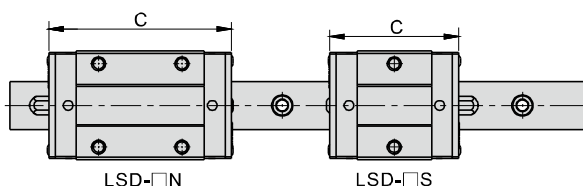

| Model   | Type     | Length C(mm)     |                         |                               |
|---------|----------|------------------|-------------------------|-------------------------------|
|         |          | Standard (Blank) | Double oil scrapers(DD) | Oil scraper+Metal scraper(ZZ) |
| LSD15□S | Short    | 40.5             | 47.5                    | 45                            |
| LSD15□N | Standard | 57               | 64                      | 61.5                          |
| LSD20□S | Short    | 46               | 53                      | 50.5                          |
| LSD20□N | Standard | 65               | 72                      | 69.5                          |
| LSD25□S | Short    | 59               | 66                      | 63.5                          |
| LSD25□N | Standard | 83               | 90                      | 87.5                          |
| LSD30□S | Short    | 68.5             | 76.5                    | 73.5                          |
| LSD30□N | Standard | 97               | 105                     | 102                           |
| LSD35□S | Short    | 73.5             | 81.5                    | 78.5                          |
| LSD35□N | Standard | 106.5            | 114.5                   | 111.5                         |



# Self-lubricator Standard Linear Guide

## LSD Series

### 2、LSD20/25/35

LSD □ 20 H N 1 X220 S20 A H - AM8-B - T-E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

|                                   |                                                                                                                                               |                                                                                             |                                                                                             |                                                                                          |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| ① Model Code                      | LSD:Self-lubricator Standard Linear Guide                                                                                                     |                                                                                             |                                                                                             |                                                                                          |
| ② Rail&Block surface treatment    | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                           |                                                                                             |                                                                                             |                                                                                          |
| ③ Rail Width                      | 20:20mm    25:23mm    35:34mm                                                                                                                 |                                                                                             |                                                                                             |                                                                                          |
| ④ Block Style                     | H: Square type    F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |                                                                                             |                                                                                             |                                                                                          |
| ⑤ Block type                      | S: Short    N: Standard                                                                                                                       |                                                                                             |                                                                                             |                                                                                          |
| ⑥ Number of Block                 | 1: One    2: Two [Note: Amount of block on a single set of linear guide]                                                                      |                                                                                             |                                                                                             |                                                                                          |
| ⑦ Length of Rail                  | 220:220mm .....[Defined by customer]                                                                                                          |                                                                                             |                                                                                             |                                                                                          |
| ⑧ Position of first mounting hole | S□ : Distance from end of rail to the center of first mounting hole<br>(It is recommended to be greater than minimum margin)                  |                                                                                             |                                                                                             |                                                                                          |
| ⑨ Preload                         | A: Standard clearance    B: Light Preload    C: Medium Preload                                                                                |                                                                                             |                                                                                             |                                                                                          |
| ⑩ Accuracy                        | N : Normal    H : High    P : Precision                                                                                                       |                                                                                             |                                                                                             |                                                                                          |
| ⑪ Nipple /adapter type            | M6:M6 Nipple                                                                                                                                  | A01:M6 to PT1/8<br>AM8:M6 to M8                                                             | L01:M6 to PT1/8<br>LM8:M6 to M8                                                             | SM6: M6 Nipple                                                                           |
|                                   |                                                             | I type  | L type  | SM6  |
| ⑫ Packing type                    | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                               |                                                                                             |                                                                                             |                                                                                          |
| ⑬ Rail type                       | Blank: Top-mount    T: Bottom-mount                                                                                                           |                                                                                             |                                                                                             |                                                                                          |
| ⑭ Self-lubricator Standard Type   | E:Self-lubricator Standard Type                                                                                                               |                                                                                             |                                                                                             |                                                                                          |

[Note ] For LSD-BB series, standard length of a rail is 3 m.  
Please contact with our company if length of rail exceeds the maximum.

# Self-lubricator Standard Linear Guide

## LSD Series

### Butt-jointed Order Information

#### 1、LSD15/30

LSD □ 15 H N 1X2970 T 2940T2970 A H-U-AM6-B-T-E

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Butt-jointed end margin:1/2P ,  
Position of the first and last  
hole is defined by customer.

|                                |                                                                                                                                            |  |                                                   |  |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------|--|
| ① Model Code                   | LSD:Self-lubricator Standard Linear Guide                                                                                                  |  |                                                   |  |
| ② Rail&Block surface treatment | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                        |  |                                                   |  |
| ③ Rail Width                   | 15:15mm 30:28mm                                                                                                                            |  |                                                   |  |
| ④ Block Style                  | H: Square type F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |  |                                                   |  |
| ⑤ Block type                   | S: Short N: Standard                                                                                                                       |  |                                                   |  |
| ⑥ Number of Block              | 2: Two [Note: Amount of block on a single set of linear guide] 1: One                                                                      |  |                                                   |  |
| ⑦ Length of first Rail         | 2970:2970mm .....[Defined by customer]                                                                                                     |  |                                                   |  |
| ⑧ Butt-jointed mark            | T: Rail Butt-jointed mark(Butt-jointed end margin:1/2P) [P is the standard hole distance]                                                  |  |                                                   |  |
| ⑨ Length of second Rail        | 2940:2940mm .....[Defined by customer]                                                                                                     |  |                                                   |  |
| ⑩ Butt-jointed mark            | Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin:1/2P) [P is the standard hole distance]                          |  |                                                   |  |
| ⑪ Length of third Rail         | Blank: two rails joint 2970:2970mm..[Defined by the customer]                                                                              |  |                                                   |  |
| ⑫ Preload                      | A: Standard clearance B: Light Preload C: Medium Preload                                                                                   |  |                                                   |  |
| ⑬ Accuracy                     | N : Normal H : High                                                                                                                        |  |                                                   |  |
| ⑭ Rail type                    | LSD15:Blank: Top-mount(M4) LSD15:U: Top-mount(M3)                                                                                          |  | LSD30:Blank: Top-mount(M6) LSD30:U: Top-mount(M8) |  |
|                                | LSD15                                                                                                                                      |  | LSD30                                             |  |
|                                |                                                                                                                                            |  |                                                   |  |

# Self-lubricator Standard Linear Guide

## LSD Series

### 2、LSD20/25/35

LSD □ 20 H N 1X2970T2940T2970A H-AM8-B-T-E

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

Butt-jointed end margin: 1/2P ,  
Position of the first and last  
hole is defined by customer.

|                                 |                                                                                                                                                 |                                                                                              |                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ① Model Code                    | LSD:Self-lubricator Standard Linear Guide                                                                                                       |                                                                                              |                                                                                                                                                                                                   |
| ② Rail&Block surface treatment  | Blank: without additional coating. (natural color)<br>★BB : Block and rail coated with black chrome                                             |                                                                                              |                                                                                                                                                                                                   |
| ③ Rail Width                    | 20:20mm                                                                                                                                         | 25:23mm                                                                                      | 35:34mm                                                                                                                                                                                           |
| ④ Block Style                   | H: Square type      F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |                                                                                              |                                                                                                                                                                                                   |
| ⑤ Block type                    | S: Short      N: Standard                                                                                                                       |                                                                                              |                                                                                                                                                                                                   |
| ⑥ Number of Block               | 1: One    2: Two [Note: Amount of block on a single set of linear guide]                                                                        |                                                                                              |                                                                                                                                                                                                   |
| ⑦ Length of first Rail          | 2970:2970mm .....[Defined by customer]                                                                                                          |                                                                                              |                                                                                                                                                                                                   |
| ⑧ Butt-jointed mark             | T: Rail Butt-jointed mark<br>(Butt-jointed end margin: 1/2P) [P is the standard hole distance]                                                  |                                                                                              |                                                                                                                                                                                                   |
| ⑨ Length of second Rail         | 2940:2940mm .....[Defined by customer]                                                                                                          |                                                                                              |                                                                                                                                                                                                   |
| ⑩ Butt-jointed mark             | Blank: two rails joint      T: Rail Butt-jointed mark<br>(Butt-jointed end margin: 1/2P) [P is the standard hole distance]                      |                                                                                              |                                                                                                                                                                                                   |
| ⑪ Length of third Rail          | Blank: two rails joint    2970:2970mm..[Defined by the customer]                                                                                |                                                                                              |                                                                                                                                                                                                   |
| ⑫ Preload                       | A: Standard clearance    B: Light Preload    C: Medium Preload                                                                                  |                                                                                              |                                                                                                                                                                                                   |
| ⑬ Accuracy                      | N : Normal      H : High                                                                                                                        |                                                                                              |                                                                                                                                                                                                   |
| ⑭ Nipple /adapter type          | M6: M6 Nipple                                                                                                                                   | A01: M6 to PT1/8<br>AM8: M6 to M8                                                            | L01: M6 to PT1/8<br>LM8: M6 to M8                                                                                                                                                                 |
|                                 |                                                             | I type  | L type  SM6: M6 Nipple  |
| ⑮ Packing type                  | Blank: the block and rail are assembled<br>B: block and rail are put separately                                                                 |                                                                                              |                                                                                                                                                                                                   |
| ⑯ Rail type                     | Blank: Top-mount      T: Bottom-mount                                                                                                           |                                                                                              |                                                                                                                                                                                                   |
| ⑰ Self-lubricator Standard Type | E:Self-lubricator Standard Type                                                                                                                 |                                                                                              |                                                                                                                                                                                                   |

[Note]For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m. Maximum length of three-joint rail is 9 m.

Please contact with our company if length of rail exceeds the maximum.

Add: Number of joints cannot be more than 2 times(three rails at most).

For LSD20/25, maximum length of jointed rail is 12080mm.

For LSD35, it's 12030.

Customization is needed for joint times more than standard.

# Self-lubricator Standard Linear Guide




## LSD Series


### 1. Block Order Information

LSD □ 15 BK - H N - H - E - AM6-E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



S: Short



N: Standard

|                                |                                                                                                                                                 |         |           |                                                                                           |         |     |             |                                                                                            |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|-------------------------------------------------------------------------------------------|---------|-----|-------------|--------------------------------------------------------------------------------------------|
| ①Model Code                    | LSD:Self-lubricator Standard Linear Guide                                                                                                       |         |           |                                                                                           |         |     |             |                                                                                            |
| ②Rail&Block surface treatment  | Blank: Block without additional coating. (natural color)<br>★B: Block coated with black chrome                                                  |         |           |                                                                                           |         |     |             |                                                                                            |
| ③Rail Width                    | 15:15mm                                                                                                                                         | 20:20mm | 25:23mm   | 30:28mm                                                                                   | 35:34mm |     |             |                                                                                            |
| ④Block Code                    | BK: Block                                                                                                                                       |         |           |                                                                                           |         |     |             |                                                                                            |
| ⑤Block Style                   | H: Square type      F1: Flange type, Mounting from top<br>F2: Flange type, Mounting from bottom<br>F3: Flange type, Mounting from top or bottom |         |           |                                                                                           |         |     |             |                                                                                            |
| ⑥Block type                    | S: Short    N: Standard                                                                                                                         |         |           |                                                                                           |         |     |             |                                                                                            |
| ⑦Accuracy                      | N : Normal      H : High                                                                                                                        |         |           |                                                                                           |         |     |             |                                                                                            |
| ⑧Group code                    | SA    SB    SC    C    E [Note1]                                                                                                                |         |           |                                                                                           |         |     |             |                                                                                            |
| ⑨Nipple /adapter type          | 15                                                                                                                                              | M4      | M4 Nipple |         |         | M6  | M6 Nipple   |         |
|                                |                                                                                                                                                 | AM6     | M4 to M6  | I type  | 20      | A01 | M6 to PT1/8 | I type  |
|                                |                                                                                                                                                 |         |           |                                                                                           | 25      | AM8 | M6 to M8    |                                                                                            |
|                                |                                                                                                                                                 |         |           | L type                                                                                    | 30      | L01 | M6 to PT1/8 | L type  |
|                                |                                                                                                                                                 | LM6     | M4 to M6  |         | 35      | LM8 | M6 to M8    |                                                                                            |
|                                |                                                                                                                                                 |         |           |                                                                                           |         | SM6 | M6 Nipple   |         |
| ⑩Self-lubricator Standard Type | E:Self-lubricator Standard Type                                                                                                                 |         |           |                                                                                           |         |     |             |                                                                                            |

[Note1] When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

## LSD Series


### Self-lubricator illustration

#### 1.Code and structure

AirTAC provides self-lubricator for applications e.g. limited spaces, or where grease maintenance is challenging.

If needed, please add the code "E" after the product model.

E.g. LSD15HN1X220S20AH-AM6-B-T-E

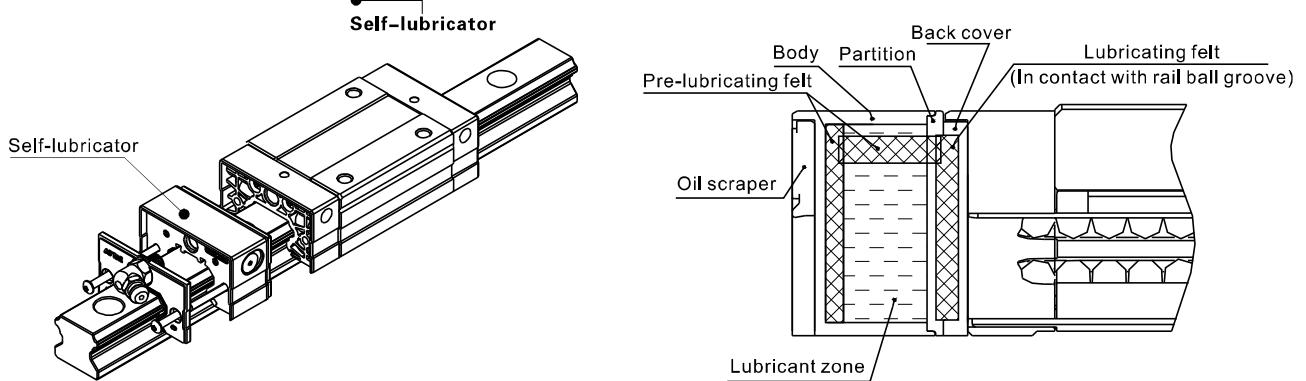

### Product Features

- Easy Maintenance and Long-Term Maintenance-Free Operation:** In normal applications, basically no additional grease maintenance is required throughout lifespan of linear guide.
- Cost Savings:** No additional lubrication is needed for the block, reducing labor and material costs.
- Flexible Use in Specific Environments:** Equipped with a high-capacity grease tank, allowing the use of specific lubricants for specific environments.
- Dustproof Design:** Built-in dustproof structure extends lifespan.
- Flexible in usage and installation:** the assembling and disassembling of self-lubricator in integrity structure is convenient, can have it according to different working condition.


[Note] Self-lubricator type block is not applicable for ultra-smooth application, as the higher viscosity of the lubricant in self-lubricator will increase friction by approximately 5–7N.

#### Durability test of self-lubricator

| Test specification | Test specification | Model | Speed   | Stroke | Lubricant type                                    |
|--------------------|--------------------|-------|---------|--------|---------------------------------------------------|
|                    | Lubricating effect | LSD20 | 30m/min | 1200mm | ISO VG680 high-quality extreme pressure lubricant |


#### Test result

Test result shows that after running 1,000 km, only 20% of the grease is consumed, and the linear guide remains lubricated. The expected service life can possibly exceed 4,000 km.

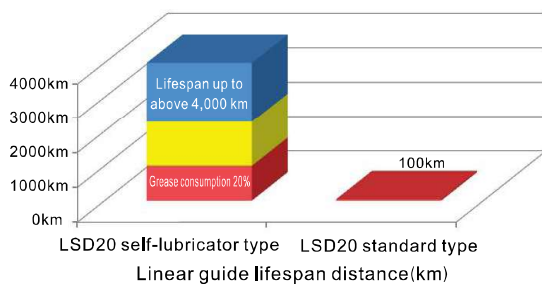

When comparing each sub-series with the self-lubricator and the standard model, the length of block will change. Please refer to the table below for details.

- Block dimension comparison (only dimension C is different from the standard, the rest remains the same)

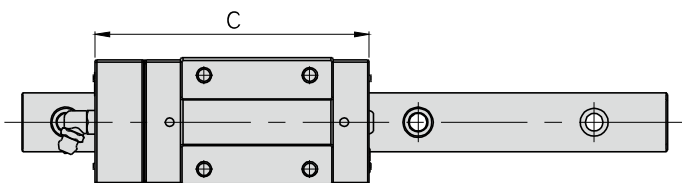

| Model   | Type     | Length C(mm)     |                               |
|---------|----------|------------------|-------------------------------|
|         |          | Standard (Blank) | Self-lubricator Standard Type |
| LSD15□S | Short    | 40.5             | 55                            |
| LSD15□N | Standard | 57               | 71.5                          |
| LSD20□S | Short    | 46               | 62                            |
| LSD20□N | Standard | 65               | 81                            |
| LSD25□S | Short    | 59               | 75                            |
| LSD25□N | Standard | 83               | 99                            |
| LSD30□S | Short    | 68.5             | 84.5                          |
| LSD30□N | Standard | 97               | 113                           |
| LSD35□S | Short    | 73.5             | 89.5                          |
| LSD35□N | Standard | 106.5            | 122.5                         |

# Low Profile Type Linear Guide

## LSD Series


### Precautions on use

#### 1. Block disassembly

With ball retainers and a dustproof cover, normally the balls are prevented from falling out when block is removed from rail.

However, if obliquely insert rail into blocks or quickly assembled or disassembled, there is a risk for balls of falling out.


Please carefully assemble the linear guide or use plastic rails to assist.

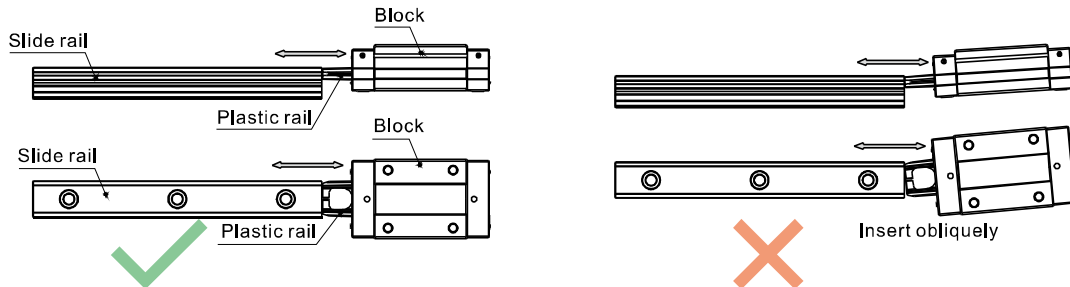


#### 2. Plastic rail installation

A plastic rail is equipped for block set. Please do not remove plastic rail whenever it is not necessary.

If plastic rail falls out and needs to be reinstalled, press the dustproof covers with fingers and install slowly to prevent balls from falling out due to misalignment of plastic rail.

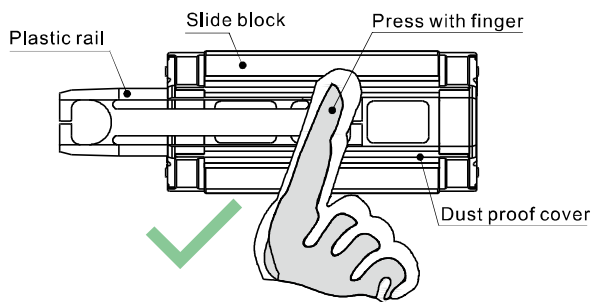

Press the dust-proof covers and insert plastic rail in alignment.

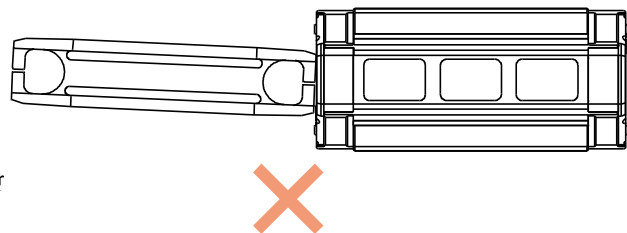

Without pressing dust-proof covers or insert plastic rail obliquely.

#### 3. Caution

- Parts may slide out if linear guide is put unevenly. Please be careful.
- Hitting or dropping linear guide could have huge effect on accuracy and lifespan even though appearance may remain intact. Please be careful.
- Do not disassemble linear guide as external objects may enter blocks and cause accuracy problem.

#### 4. Lubrication

- Linear guide have been treated with anti-rust oil during production. Before use, wipe the rail and treat it with lubrication.
- Do not mix lubricating oil (grease) with different properties.
- After lubrication, move block back and forth for the length of three blocks long and repeat at least 2 times to ensure there is a grease file on rail.

#### 5. Use

- The operating environment temperature should not exceed 80°C, and the maximum temperature should not exceed 100°C.
- Do not separate blocks from rail whenever it is not necessary. If you need to separate them, please use plastic rails to prevent steel balls from falling out.

#### 6. Storage

- When storing blocks, rails or linear guide set, please be sure that anti-rust oil is well applied and product is well sealed as well as placed horizontally. Avoid humidity and high temperatures environment.